

Music production Center

SAFETY INSTRUCTIONS


INFORMATIONS

- Parts identified by the <u>∧</u> symbol are critical for safety.
 Replace them only with the parts number specified.
- 2. In addition to safety, other parts and assemblies are specified for conformance with such regulations as those applying to spurious radiation.

These must also be replaced only with the specified replacements.

Examples: Noise blocking capacitors, noise blocking filters, etc.

- 3. Use specified internal wiring. Note especially:
 - 1) Wires covered with PVC tubing
 - 2) Double insulated wires
 - 3) High voltage leads
- Use specified insulating materials for hazardous live parts.
 Note especially:
 - 1) Insulation Tape
 - 2) PVC tubing
 - 3) Spacers (insulating barriers)
 - 4) Insulation sheets for transistors
 - 5) Plastic screws for fixing micro switches
- When replacing AC primary side components (transformers, power cords, noise blocking capacitors, etc.), wrap the ends of the wires securely around the terminals before soldering.



- 6. Make sure that wires do not contact heat producing parts (heat sinks, oxide metal film resistors, fusible resistors, etc.).
- 7. Check that replaced wires do not contact sharp edged or pointed parts.
- 8. Also check areas surrounding repaired locations.
- Make sure that foreign objects (screws, solder droplets, etc.) do not remain inside the set.

SAFETY CHECK AFTER SERVICING

After servicing, make measurements of leakage-current or resistance in order to determine that exposed parts are acceptably insulated from the supply circuit. The leakage-current measurement should be done between accessible metal parts (such as chassis, ground terminal, microphone jacks, signal input/output connectors, etc.) and the earth ground through a resistor of 1500 ohms paralleled with a 0.15 F capacitor, under the unit's normal working conditions.

The leakage-current should be less than 0.5 mA rms AC. The resistance measurement should be done between accessible exposed metal parts and power cord plug prongs with the power switch (if included) "ON". The resistance should be more than 2.2 M ohms.

SYMBOLS FOR PRIMARY DESTINATION

Unit destinations are indicated with letters as shown below.

Symbols	Principal Destinations
Α	U.S.A
В	England
E	Europe
J	Japan
V	Germany
X1	Japan
X4	Universal Area

MAKE YOUR CONTRIBUTION TO PROTECT THE ENVIRONMENT

Used batteries with the ISO symbol for recycling as well as small accumulators (rechargeable batteries), mini-batteries (cells) and starter batteries should not be thrown into the garbage can.



Please leave them at an appropriate depot.

PRECAUTIONS FOR LITHIUM BATTERY

The lithium battery may explode when incorrectly replaced. [OBSERVE THE FOLLOEING WHEN REPLACING]

Replace with the same make and type or equivalent recommended by manufacturer.

Place battery in correct polarity.

Do not short the terminals.

Do not charge battery.

Do not dispose of battery in fire.

I. SPECIFICATIONS

	General
Display	240 x 64 dot graphic LCD w/back light
Memory card slot	Compact Flash (The size of the compact flash card the MPC2500 can handle is from 32MB to 2GB)
Dimentions (W x H x D)	415(w) x 93.5(H) x 332.9(D)mm
Weight	6.15kg
Power regirement	21W
	Sound generator
Sampling rate	44.1kHz
Memory capacity	16MB standard (11.5MB for sound memory), expandable to 128MB
Recording time	136sec. (16MB, MONO), 24m28sec. (128MB, MONO)
Memory expansion slot	1 x for optional EXM128
Data format	16-bit linear
Polyphony	32
Dynamic filtering	2 x 2-pole filter per voice
Filter type	Low pass, Band pass, High pass
Preset sound memory	5MB
Number of programs	24
	Effects
Effects	2 stereo effects and Master effect
Effect type	Chorus, Flanger, Bit grunger, 4 band EQ, Compressor, Phase shifter, Tremolo, Flying pan, Reverb, Delay Master effect: 4 band EQ, Compressor
	Sequencer
Maximum events	100,000 notes
Resolution	96 parts per 1/4-note
Sequences	99
Tracks per sequence	64
MIDI output channels	64 (16 channels x 4 outputs)
Song mode	20 songs, 250 steps per song
Drum pad	16 (velocity and pressure sensitive)
Drum pad banks	4
Sync mode	MIDI clock


^{*} The specifications are subject to change without the prior notice.

	Inputs / Outputs
Record input (L and R)	1/4-inch stereo phone x 2, balanced -40dBu, input impedance 11k ohms; Max. Input level +10dBu
Digital input	RCA-pin x 1 S/PDIF
Stereo output (L and R)	1/4-inch phone x 2 unbalanced +11dBu, output impedance 1k Ohms, Max. output level +22dBu
8 individual outputs	1/4-inch phone x 8 unbalanced +11dBu, output impedance 1k Ohms, Max. output level +22dBu
Phones output	1/4-inch stereo phone x 1, 200mW / 100 ohms
Digital output	RCA-pin x 1 S/PDIF
MIDI inputs	5-pin DIN x 2
MIDI outputs	5-pin DIN x 4
USB	Slave connector x 1, USB MASS STORAGE CLASS support. (You need Windows 2000/Me/XP or later version, or MacOS 9.x/10.x or later version.)
Footswitches	1/4-inch phone x 2
	Standard accessories
Standard accessories	32MB Compact Flash card, Power cable, Operator's manual
	Options
EXM128	128MB expansion memory card
CD-M25	Internal CD drive


^{*} The specifications are subject to change without the prior notice.


II. DISASSEMBLY

In case of trouble, etc., necessitating dismantling, please dismantle in the order shown in the illustrations. Reassemble in the reverse order.

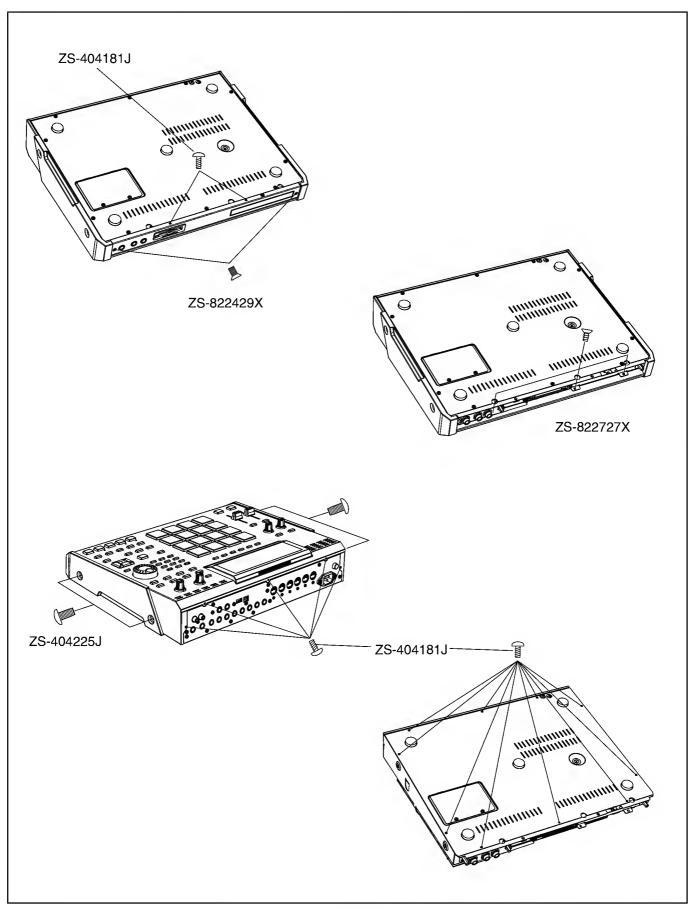

III. PRINCIPAL PARTS LOCATION

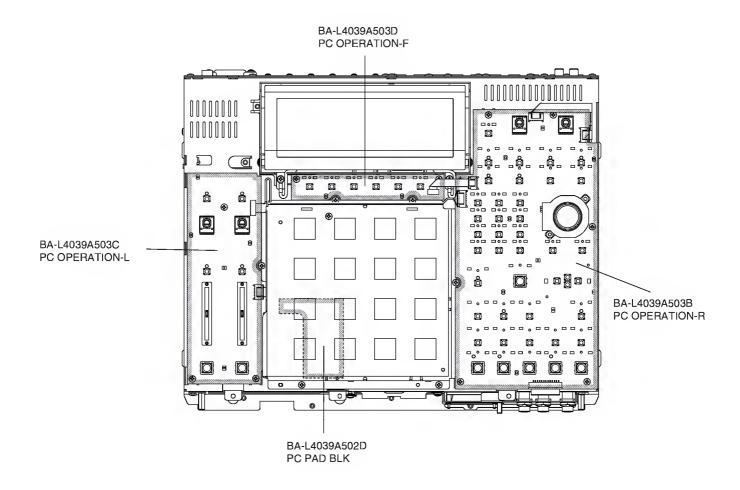

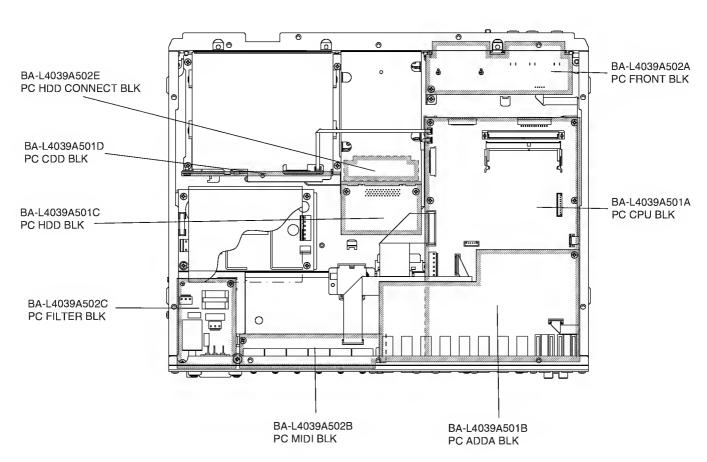

IV. SUPPLEMENTARY INFORMATION

[Update procedure]

===How to copy the OS binary file to a CF card using a MPC2500 and a computer====

Below procedure will utilize the MPC2500 as a Compact flash writer.

Required Equipment:

Compact Flash (CF), Computer with USB mass storage class support (Windows XP/ME/2000 or Mac OSX, OS9.x)

- 1. Copy/Download the OS data to a computer's hard disc drive and extract it's data.
- 2. Insert a Compact Flash card into the MPC2500.
- 3. Turn on the power of the MPC2500.
- 4. Go to Load mode, then press USB (F4).
- Connect a USB cable between the computer and the MPC2500. (Display will change from "Status=Not Connected" to "Status=Connected")
- 6. The CF in the MPC2500 will be mounted as a drive on the computer.
- 7. Copy the OS binary file to the CF in the MPC2500.
- 8. Disconnect the USB cable. (MPC2500 will not accept any user input while a USB cable is connected)

Note: The OS data can also be copied to a Compact Flash card using any other Compact Flash card reader/writer. In this case it is not necessary to connect the MPC2500 to a computer.

====How to update the MPC2500====

MPC2500 is updated using a Compact Flash card containing OS data.

- 1. Insert a CF containing OS data into the MPC2500.
- 2. Turn on the power of the MPC2500 while pressing down the "Window" button.
- 3. ====MPC2500 OS UPDATE==== File: M25V100B.BIN (version information) will be displayed on the LCD screen.
- 4. To start the update process, press the "F6 (DO IT)" button. After the update process is finished the MPC2500 will re-boot automatically.

Note: The MPC2500 can't be updated from a computer via USB directly – updating is only possible using a CF card.

[Test program]

Test programs on the MPC2500 can be run either using a Test OS or a JIG PC Flash Rom.

[Running the test Program using a Test OS]

A test program can be installed on the MPC2500 by updating it with a Test OS. The Test OS must be copied to a CF card from which it will be written to the Flash ROM of the MPC2500. The installation procedure is the same as for a normal OS update. For a description of the test mode functions, refer to the "MPC2500 Test Program list".

Note: Once the Test OS is installed, the unit will always start up using the Test OS, until the regular OS is re-installed.

[Running the test Program using a JIG PC Flash ROM MPC2.5K (AJ-771314J)]

The PC Flash ROM is used during repair for the testing jig and boot block recovery.

To access the test program on the PC Flash ROM MPC2.5K follow this procedure:

- 1. Turn off the MPC2500 and open the unit.
- 2. Insert the PC Flash MPC2.5K ROM into J110 on the CPU board.
- 3. Turn on the MPC2500 to start up the Test OS from the PC Flash ROM.

[Hidden modes]

The MPC2500 has the following hidden modes, which can be accessed by certain input sequences or holding down a key while powering on the unit.

[Owner Name]

Mode > Other > F3/FOOTSW > F6 > Enter owner name

In the startup screen, "Owner Name" will be displayed.

[Initialize parameter]

Hold down the ERASE button while powering on the unit.

[Demo mode]

Hold down the Bank "D" button while powering on the unit.

In this mode "Internal memory" on the Save page can not be selected. In the startup screen "Demo" will be displayed instead of "MPC2500". Once demo mode has been activated it will remain active even if power is turned off and on again. To turn off the Demo mode, hold down the Bank "D" button while powering on the unit.

MPC2500	Test	Program

		F2 JOG	Q-LINK AND JOG TEST		Q-Link, Joginput value displyed
				F1 VELO/PEEK	Each Pad input Velocity/Peek value displayed.
		F3 PAD	PAD TEST	F5 RESET	Reset Value
F1 PANEL	PANEL TEST	F4 LCD	LCD TEST		All dot of LCD change to Black. Contrast adjusting by JOG
				P L	Contrast adjusting by SHIFT+JUG
			LED TEST	F6 EXIT	און רבתס ופון ני
		F6 EXIT			
				F1 SIMPL	SDRAM simple check
				F3 FUL	SDRAM all area READ/WRITE check
		F1 SDRAM	SDRAM TEST		
				F5	
				F6 EXIT	
				F1 SIMPL	CF card simple check
				F2 DETEC	Type of CF card display
		F2 CF	CF CARD TEST	F3	Enriquent
				F5 ERASE	Delete CF card data
					HDD simple check
F2 MEMORY	MEMORY TEST			F2 DETEC	Type of HDD displayed
		F3 HDD	HDD TEST		
					For development
				F5 ERASE	Delete HDD dataHDD
				F1 SIMPL	No function
		F4 CDD	CDD TEST	F2 DETEC	Type of CD drive displayed
					MOD 1-100 t-100 t-100 m
				FI POS	Write Test US to Flash RUM
			EI ASH WRITING		Nofinction
		F5			No function
				F6 EXIT	ואַ ימוֹנְאָנוֹאָן
		F6 EXIT			
		F1 A/D	A/D selected		A/D In => Out Main, 12, 34, 56, 78
		F2 SPDIF	SPDIF selected		DIGITAL In => Out Main, 12,34,56,78
E3 ALIDIO	ANDIO TEST	F3 TONE	TEST TONE		FULL bit signal output to all OUTPUT.
		F4			
		F6 EXIT			
		F1 START F2	MIDI OUTA > MIDI IN 1 OK (Connect MIDI cable OUT to IN, Each	=ach	Start Loop back Test, MIDI OUT A/B/C/D> MIDI IN 1/2
F4 MIDI	MIDI TEST	F3	connection result dislayed)		
		F2			
	FOOL FOOL		F.SW1: ON F.SW2: OFF		
AAC.T	FOOI SW [ES]	F4	(Foot SW status displayed)		
		-			

V. PARTS LIST

ATTENTION

- 1. When placing an order for parts, be sure to list the Part No., Model No. and the description of each part.

 Otherwise, the non-delivery of the part or the delivery of a wrong part may result.
- Please make sure that Part No. is correct when ordering.If not, a part different from the one you ordered may be delivered.
- 3. Since the parts shown in Parts List or Preliminary Service Manual may have been the subject of changes, please use this Parts List for all future reference.

HOW TO USE THIS PARTS LIST

- 1. This Parts List lists those parts which are considered necessary for repairs.
- 2. Parts not shown in the Parts List will not in principle be supplied.
- 3. How to read the Parts List.

1. PC MAIN BOARD BLK

Ref. No.	Part No.	Description
D5	ED-431276C	D SCHOT 1S30-J T05
D110	ED-431276C	D SCHOT 1S30-J T05
:		
:		
IC5	EI-811073J	ICTRC-6593
IC10	<u>EI</u> -811068J	IC HD74HC157FP
Λ	Λ	
	Servic	e parts classification
	These reference symbols in the Sch	ymbols correspond with component nematic Diagrams.

2. FINAL ASSEMBLY BLK

in the figure.

Ref. No.	Part No.	Description
1.	SA-349332	FOOT
2.	ZS-344754C	ST PAN30x06STL CMT
	:	
	:	
44.	SP-417333J	COVER TOP
45.	ZS-418385J	BT BID30X06STL BNI EATRH LOCK
46-A	△ EW-380905J	AC CORD 250S KP300 KS16A
		H B J [J]
46-B	△ EW-368420J1	AC CORD 200SKP30KS B AC [A]
46-C	△ EW-410608J	AC CORD 250 KP4819D KS31A B E
Λ	Λ	[<u>E,V</u>]
΄Ι΄		
		Symbols for primary destination
		[A] U.S.A. [J] Japan
		[B] England [V] Germany
		[E] Europe [x1] Japan
		[X4] Universal Area
		[]
	Safety critical c	omponent
∟ _{Th}	is number correspond	s with the individual parts index number

WARNING

INDICATES SAFETY CRITICAL COMPONENTS. FOR CONTINUED SAFETY, REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS.


AVERTISSEMENT


IL INDIQUE LES COMPOSANTS CRITIQUES DE SÉCURITÉ. POUR MAINTENIR LE DEGRÉ DE SÉCURITÉDE L'APPAREIL, NE REMPLACER QUE DES PIÉCES RECOMMANDEES PAR LÉ FABRICANT.


1. PC BOARD BLK		IC101	EI - 812479J	IC NJM5532M FPT1T32P	
Ref. No. Part	No. Description	IC102	EI - 812479J	IC NJM5532M FPT1T32P	
1 BA - L403	9A020A PC(#)MAIN BLK MPC2500	IC103	EI - 812479J	IC NJM5532M FPT1T32P	
2 BA - L403	. ,	IC104	EI - 822388X	IC PCM1793DBR	
3 BA - L403	9A040A PC(#)OPERATION BLK MPC2500	J3	EJ - 821781X	SOCKET DMM3-RS144A2B-13 1	44P
DOWNALL DLIK CONOICT	O OF FOLLOWING D. O. DOADDO	J103	EJ - 822373X	SOCKET BL112-42RL 42P	
• •	S OF FOLLOWING P.C. BOARDS	J104	EJ - 822373X	SOCKET BL112-42RL 42P	
1 BA - L403 2 BA - L403		PH1	ET - 821874X	DETECTOR HCPL-0701	
3 BA - L403		PH2 SF1	ET - 821874X Δ EF - 810572J	DETECTOR HCPL-0701	=
4 BA - L403		SF1	△ EF - 810572J	FUSE C.ICP-S2.3 50V 2.3A T08 FUSE C.ICP-S2.3 50V 2.3A T08	
	TS OF FOLLOWING P.C. BOARDS	TR1	ET - 821788X	TR FET CHIP 2SK3065T100 T12	
1 BA - L403		TR2	ET - 821788X	TR FET CHIP 2SK3065T100 T12	
2 BA - L403		TR3	ET - 821788X	TR FET CHIP 2SK3065T100 T12	
3 BA - L403	9A502C PC FILTER BLK	TR4	ET - 821788X	TR FET CHIP 2SK3065T100 T12	
4 BA - L403	9A502D PC PAD BLK	TR5	ET - 821788X	TR FET CHIP 2SK3065T100 T12	E
5 BA - L403	9A502E PC HDD CONNECT BLK	TR6	ET - 821789X	TR CHIP DTB113ZKT146 T08E	
• *	DNSISTS OF FOLLOWING P.C. BOARDS	TR7	ET - 821789X	TR CHIP DTB113ZKT146 T08E	
1 BA - L403		TR8	ET - 821789X	TR CHIP DTB113ZKT146 T08E	
2 BA - L403		TR9	ET - 821789X	TR CHIP DTB113ZKT146 T08E	
3 BA - L403	9A503D PC OPERATION-F	TR10	ET - 821789X	TR CHIP DTB113ZKT146 T08E	
		TR101	ET - 810831J	TR.CHIP 2SC3326 A,B TE85LT0	
2. PC CPU BLK		TR102	ET - 810831J	TR.CHIP 2SC3326 A,B TE85LT0	
Ref. No. Part		TR103	ET - 810831J	TR.CHIP 2SC3326 A,B TE85LT0	
D901 ED - 8217		TR104	ET - 810831J	TR.CHIP 2SC3326 A,B TE85LT0	
D902 ED - 8217		TR105	ET - 810831J	TR.CHIP 2SC3326 A.B.TE85LT0	
IC901 EI - 8218 IC902 EI - 8218		TR106 TR901	ET - 810831J ET - 428249J	TR.CHIP 2SC3326 A,B TE85LT0 TR C.2SC2412K R,S T146T08	
J1 EJ - 8218			ET - 428249J ET - 429898J	TR C.2SC2412K R,S T146T08 TR C.DTA114EKA T146T08	
J2 EJ - 8226		TR902	ET - 430868J	TR C.DTC114EKA T146T08	
J5 EJ - 8210			ET - 428249J	TR C.2SC2412K R,S T146T08	
J6 EJ - 8210			ET - 428248J	TR C.2SA1037AK R,S T146T08	
J102 EJ - 8223		X1	EI - 822642X	OSC X'TAL C.FC0736B 13.330N	
J110 EJ - 4192		X2	EI - 822643X	OSC X'TAL C.FCO736B 48.0000	
L901 EO - 8217	58X COIL FIX 1 PE-52627				
L902 EO - 8217	58X COIL FIX 1 PE-52627	3. PC AI	DDA BLK		
L903 EO - 8223	47X COIL FIX 1 SL0912UW55 220K	Ref. No.	Part No.	Description	
L904 EO - 8223		J101	EJ - 810886J	SOCKET 128A-032S2A-S14A 32	P
L905 EO - 8223		J201	EJ - 821273X	PHONE J YKB26-5326 S.NUT 6.	
P101 EJ - 8108		J202	EJ - 821273X	PHONE J YKB26-5326 S.NUT 6.	
P105 EJ - 8223		J301	EJ - 821000X	PHONE J YKB26-5264 S.NUT 6.	
R913		J302	EJ - 821000X	PHONE J YKB26-5264 S.NUT 6.	
R914		J303	EJ - 821000X	PHONE J YKB26-5264 S.NUT 6.	
R915 ER - 8226		J304	EJ - 821000X	PHONE J YKB26-5264 S.NUT 6.	
D1 ED - 4289 D2 ED - 4289		J305 J306	EJ - 821000X EJ - 821000X	PHONE J YKB26-5264 S.NUT 6. PHONE J YKB26-5264 S.NUT 6.	
D3 ED - 8123		J307	EJ - 821000X	PHONE J YKB26-5264 S.NUT 6.	
D4 ED - 8123		J308	EJ - 821000X	PHONE J YKB26-5264 S.NUT 6.	
D5 ED - 8123		IC201	EI - 812479J	IC NJM5532M FPT1T32P	o Tara out
D6 ED - 8123		IC202	EI - 812479J	IC NJM5532M FPT1T32P	
D7 ED - 8123		IC203	EI - 812479J	IC NJM5532M FPT1T32P	
D8 ED - 8123	38J D ZENER C.UDZ4.7BTE-17 T08E	IC204	EI - 812479J	IC NJM5532M FPT1T32P	
D903 ED - 8123	54J D ZENER C.RB081L-20 TE25T12E	IC301	EI - 812479J	IC NJM5532M FPT1T32P	
D904 ED - 8123	38J D ZENER C.UDZ4.7BTE-17 T08E	IC302	EI - 812479J	IC NJM5532M FPT1T32P	
IB1 ER - 8227	07X COMP R C.CRA03 330J T08	IC303	EI - 812479J	IC NJM5532M FPT1T32P	
IB2 ER - 8227		IC304	EI - 812479J	IC NJM5532M FPT1T32P	
IB3 ER - 8227		IC305	EI - 812479J	IC NJM5532M FPT1T32P	
IB4 ER - 8227		IC306	EI - 812479J	IC NJM5532M FPT1T32P	
IB5 ER - 8227		IC307	EI - 812479J	IC NJM5532M FPT1T32P	
IB6 ER - 8227		IC308	EI - 812479J	IC NJM5532M FPT1T32P IC NJM5532M FPT1T32P	
IB7 ER - 8227		IC401	EI - 812479J		
IB8 ER - 8227 IC1 EI - 8223		IC402 IC403	EI - 812479J EI - 812479J	IC NJM5532M FPT1T32P IC NJM5532M FPT1T32P	
IC2 EI - 8223		IC403	EI - 812479J	IC NJM5532M FPT1T32P	
IC3 EI - 8218		IC601	EI - 822212X	IC AD1837AS QFTY	
IC4 EI - 8218		IC602	EI - 821830X	IC CS8427-CS FP	
IC5 EI - 8129		IC603	EI - 822731X	IC 74HCU04DT FPELT16E	
IC6 EI - 8129		T1	BT - 810651J	TRANS PULSE CIT0705S-35101	TFP
IC7 EI - 8129		TR501	ET - 810831J	TR.CHIP 2SC3326 A,B TE85LT0	
IC8 EI - 8129		TR502	ET - 810831J	TR.CHIP 2SC3326 A,B TE85LT0	
IC9 EI - 8129		TR503	ET - 810831J	TR.CHIP 2SC3326 A,B TE85LT0	
IC10 EI - 8129	79J IC HD74LVC245ATELL FPELT16E	TR504	ET - 810831J	TR.CHIP 2SC3326 A,B TE85LT0	
IC11 EI - 8207	95X IC HD74LVC14TELL FPELT12E	TR505	ET - 810831J	TR.CHIP 2SC3326 A,B TE85LT0	
IC12 EI - 8223	B2X IC 74HCT541D	TR506	ET - 810831J	TR.CHIP 2SC3326 A,B TE85LT0	8E
IC13 EI - 8223		TR507	ET - 810831J	TR.CHIP 2SC3326 A,B TE85LT0	8E
IC14 EI - 8218		TR508	ET - 810831J	TR.CHIP 2SC3326 A,B TE85LT0	
IC15 EI - 8218		TR509	ET - 810831J	TR.CHIP 2SC3326 A,B TE85LT0	
IC16 EI - 8218		TR510	ET - 810831J	TR.CHIP 2SC3326 A,B TE85LT0	
IC17 EI - 8223		TR511	ET - 810831J	TR.CHIP 2SC3326 A,B TE85LT0	
IC19 EI - 8223		TR512	ET - 810831J	TR.CHIP 2SC3326 A,B TE85LT0	
IC20 EI - 8223	90X IC XC2S15-5VQ100C	TR513	ET - 810831J	TR.CHIP 2SC3326 A,B TE85LT0	8E
	DOV TO ATOMAZOE ED TAGE	TDC44	ET 0400047	TO OUR ACCOUNT A PERCY TO	0.
IC21 EI - 8214	06X IC AIC1117CE FP T16E	TR514	ET - 810831J	TR.CHIP 2SC3326 A,B TE85LT0	8E


TR515 TR516	ET - 810831J	TR.CHIP 2SC3326 A.B TE85LT08E	D759	ED - 822378X	D LED L-169XQWC-C WHITE
X601	ET - 810831J EI - 822641X	TR.CHIP 2SC3326 A,B TE85LT08E OSC X'TAL C.FCO736B 11.2896MHZ	D760 D761	ED - 822379X ED - 822379X	D LED L-169XSURDK RED D LED L-169XSURDK RED
7001	LI - 022041X	000 X TAE 0.1 00730B T1.2030M12	D762	ED - 822379X	D LED L-169XSURDK RED
4. PC HDD	BLK		D763	ED - 822379X	D LED L-169XSURDK RED
Ref. No.	Part No.	Description	D764	ED - 822379X	D LED L-169XSURDK RED
P812	EJ - 821777X	PLUG DHB-PA50-R131N 50P	D765	ED - 822379X	D LED L-169XSURDK RED
J104	EJ - 822373X	SOCKET BL112-42RL 42P	D766	ED - 822379X	D LED L-169XSURDK RED
J108	EJ - 822373X	SOCKET BL112-42RL 42P	D767	ED - 822379X	D LED L-169XSURDK RED
5 50 000	DI I		J102	EJ - 822395X	SOCKET 26FMZ-ST 26P
5. PC CDD Ref. No.	Part No.	Description	SW701	ES - 415015J ES - 415015J	SW TACT SKQEAD
J108	EJ - 822373X	Description SOCKET BL112-42RL 42P	SW702 SW703	ES - 415015J	SW TACT SKQEAD SW TACT SKQEAD
P813	EJ - 822376X	SOCKET KX14-50K5D 50P	SW703	ES - 415015J	SW TACT SKQEAD
1010	L0 - 022010X	000KE110K14-30K3D 30I	SW705	ES - 415015J	SW TACT SKQEAD
6. PC FRO	NT BLK		SW706	ES - 349474	SW TACT SKHHAM004A
Ref. No.	Part No.	Description	SW707	ES - 349474	SW TACT SKHHAM004A
IC801	EI - 812705J	IC NJM4556AL	SW708	ES - 349474	SW TACT SKHHAM004A
J801	EJ - 821386X	PHONE J YKB22-5264 NUT 6.3	SW709	ES - 349474	SW TACT SKHHAM004A
J802	EJ - 821386X	PHONE J YKB22-5264 NUT 6.3	SW710	ES - 349474	SW TACT SKHHAM004A
J803	EJ - 821386X	PHONE J YKB22-5264 NUT 6.3	SW711	ES - 349474	SW TACT SKHHAM004A
	⚠ ER - 822728X	R OMF H F12 FS MOF 1W 101J	SW712	ES - 349474	SW TACT SKHHAM004A
	△ ER - 822728X	R OMF H F12 FS MOF 1W 101J	SW713	ES - 349474	SW TACT SKHHAM004A
J103	EJ - 822373X	SOCKET BL112-42RL 42P	SW714	ES - 349474	SW TACT SKHHAM004A
J804	EJ - 822374X	SOCKET CFHD-19-0034 50P	SW715	ES - 349474	SW TACT SKHHAM004A
7. PC MIDI	RI K		SW716 SW717	ES - 349474 ES - 415015J	SW TACT SKHHAM004A SW TACT SKQEAD
Ref. No.	Part No.	Description	SW717	ES - 349474	SW TACT SKHHAM004A
J805	EJ - 427801J	DIN J TCS5084-45-4151 5P	SW719	ES - 349474	SW TACT SKHHAM004A
J806	EJ - 427801J	DIN J TCS5084-45-4151 5P	SW720	ES - 349474	SW TACT SKHHAM004A
J807	EJ - 427801J	DIN J TCS5084-45-4151 5P	SW721	ES - 349474	SW TACT SKHHAM004A
J808	EJ - 427801J	DIN J TCS5084-45-4151 5P	SW722	ES - 349474	SW TACT SKHHAM004A
J809	EJ - 427801J	DIN J TCS5084-45-4151 5P	SW723	ES - 349474	SW TACT SKHHAM004A
J810	EJ - 427801J	DIN J TCS5084-45-4151 5P	SW724	ES - 349474	SW TACT SKHHAM004A
			SW725	ES - 349474	SW TACT SKHHAM004A
8. PC FILTI			SW726	ES - 349474	SW TACT SKHHAM004A
Ref. No.	Part No.	Description	SW727	ES - 349474	SW TACT SKHHAM004A
	⚠ EO - 822706X ⚠ ES - 812750J	COIL LF ET24-562U-EH4	SW728	ES - 349474	SW TACT SKHHAM004A
SW901	A E3 - 012/30J	SW PUSH SDKEC 02-1 Power SW	SW729 SW730	ES - 349474 ES - 349474	SW TACT SKHHAM004A SW TACT SKHHAM004A
9. PC PAD	BI K		SW730	ES - 349474	SW TACT SKHHAM004A
Ref. No.	Part No.	Description	SW732	ES - 349474	SW TACT SKHHAM004A
J811	EJ - 821080X	SOCKET 5229-20APB 20P	SW733	ES - 349474	SW TACT SKHHAM004A
D850	ED - 428998J	D SILICON C.1SS355TE-17 T08E	SW734	ES - 349474	SW TACT SKHHAM004A
D851	ED - 428998J	D SILICON C.1SS355TE-17 T08E	SW735	ES - 349474	SW TACT SKHHAM004A
D852	ED - 428998J	D SILICON C.1SS355TE-17 T08E	SW736	ES - 349474	SW TACT SKHHAM004A
D853	ED - 428998J	D SILICON C.1SS355TE-17 T08E	SW737	ES - 349474	SW TACT SKHHAM004A
D854	ED - 428998J	D SILICON C.1SS355TE-17 T08E	SW738	ES - 349474	SW TACT SKHHAM004A
D855	ED - 428998J	D SILICON C.1SS355TE-17 T08E	SW739	ES - 349474	SW TACT SKHHAM004A
D856	ED - 428998J	D SILICON C.1SS355TE-17 T08E	SW740 SW741	ES - 349474	SW TACT SKHHAM004A
D857 D858	ED - 428998J ED - 428998J	D SILICON C.1SS355TE-17 T08E D SILICON C.1SS355TE-17 T08E	SW741	ES - 349474 ES - 349474	SW TACT SKHHAM004A SW TACT SKHHAM004A
D859	ED - 428998J	D SILICON C.1SS355TE-17 T08E	SW743	ES - 349474	SW TACT SKHHAM004A
D860	ED - 428998J	D SILICON C.1SS355TE-17 T08E	SW756	ES - 822352X	SW R.ENCORDER SRGPSJ0500
D861	ED - 428998J	D SILICON C.1SS355TE-17 T08E	VR701	EV - 822422X	VR ROTARY RD14K12D L20 C203X2
D862	ED - 428998J	D SILICON C.1SS355TE-17 T08E	VR702	EV - 822377X	VR ROTARY RD14K12D L20 3B103X2
D863	ED - 428998J	D SILICON C.1SS355TE-17 T08E	D701	ED - 811455J	D SILICON H 1SS133T-77 T26
D864	ED - 428998J	D SILICON C.1SS355TE-17 T08E	D702	ED - 811455J	D SILICON H 1SS133T-77 T26
D865	ED - 428998J	D SILICON C.1SS355TE-17 T08E	D703	ED - 811455J	D SILICON H 1SS133T-77 T26
D866	ED - 428998J	D SILICON C.1SS355TE-17 T08E	D704	ED - 811455J	D SILICON H 1SS133T-77 T26
D867	ED - 428998J	D SILICON C.1SS355TE-17 T08E	D705	ED - 811455J	D SILICON H 188133T-77 T26
D868 D869	ED - 428998J ED - 428998J	D SILICON C.1SS355TE-17 T08E D SILICON C.1SS355TE-17 T08E	D706 D707	ED - 811455J ED - 811455J	D SILICON H 188133T-77 T26
D870	ED - 4209903 ED - 822380X	D SCHOT, C. RB751V-40 T08E	D707	ED - 811455J	D SILICON H 1SS133T-77 T26 D SILICON H 1SS133T-77 T26
D871	ED - 822380X	D SCHOT. C. RB751V-40 T08E	D709	ED - 811455J	D SILICON H 188133T-77 T26
D872	ED - 822380X	D SCHOT. C. RB751V-40 T08E	D710	ED - 811455J	D SILICON H 188133T-77 T26
D873	ED - 822380X	D SCHOT. C. RB751V-40 T08E	D711	ED - 811455J	D SILICON H 1SS133T-77 T26
IC850	EI - 820659X	IC NJM2082M FPTE1T16E	D712	ED - 811455J	D SILICON H 1SS133T-77 T26
IC851	EI - 820659X	IC NJM2082M FPTE1T16E	D713	ED - 811455J	D SILICON H 1SS133T-77 T26
IC852	EI - 822386X	IC CD74HCT04M96	D714	ED - 811455J	D SILICON H 1SS133T-77 T26
IC853	EI - 821829X	IC CD74HCT4051M96	D715	ED - 811455J	D SILICON H 1SS133T-77 T26
			D716	ED - 811455J	D SILICON H 1SS133T-77 T26
	D CONNECT BLK	B	D717	ED - 811455J	D SILICON H 1SS133T-77 T26
Ref. No.	Part No.	Description	D718	ED - 811455J	D SILICON H 1SS133T-77 T26
J812	EJ - 821780X	SOCKET DHB-RA50-R131N 50P	D719	ED - 811455J	D SILICON H 1SS133T-77 T26
J814	EJ - 822375X	SOCKET PTRZ-50R1-B-R1 50P	D720 D721	ED - 811455J ED - 811455J	D SILICON H 1SS133T-77 T26 D SILICON H 1SS133T-77 T26
11 PC OPI	ERATION-R BLK		D721	ED - 811455J ED - 811455J	D SILICON H 1551331-77 126 D SILICON H 155133T-77 T26
Ref. No.	Part No.	Description	D723	ED - 811455J	D SILICON H 1331331-77 126 D SILICON H 1SS133T-77 T26
D756	ED - 812087J	D LED L-934SRD-G RED	D724	ED - 811455J	D SILICON H 188133T-77 T26
D757	ED - 812087J	D LED L-934SRD-G RED	D725	ED - 811455J	D SILICON H 1SS133T-77 T26
D758	ED - 812086J	D LED L-934SGD GREEN	D726	ED - 811455J	D SILICON H 1SS133T-77 T26

D727				
	ED - 811455J	D SILICON H 1SS133T-77 T26	21 SP - 822294X	PANEL REAR MPC2500
D728	ED - 811455J	D SILICON H 1SS133T-77 T26	22 ! EJ - 358632J2	SOCKET INLET SOT-16 3P
D729	ED - 811455J	D SILICON H 1SS133T-77 T26		
			23 ZS - 820481X	BT PAN30X08STL BZN C080
D730	ED - 811455J	D SILICON H 1SS133T-77 T26	24 ZS - 822425X	BID40X10STL BZN
D731	ED - 811455J	D SILICON H 1SS133T-77 T26	25 ZS - 822662X	TWB40
D732	ED - 811455J	D SILICON H 1SS133T-77 T26	26 ZS - 413267	N FRANGE 40STL CMT
D733	ED - 811455J	D SILICON H 1SS133T-77 T26	27 ZS - 394414J	BT BID30X08STL BZN
D734	ED - 811455J	D SILICON H 1SS133T-77 T26	28 ZS - 822426X	BID30X08STL BZN
D735	ED - 811455J	D SILICON H 1SS133T-77 T26	29 ZS - 822427X	PAN26X06STL BZN
D736	ED - 811455J	D SILICON H 1SS133T-77 T26	30 EJ - 821236X	SOCKET CONNECTER YKF45-0020 4P USB
D737	ED - 811455J	D SILICON H 1SS133T-77 T26	31 EJ - 822660X	PIN J YKC21-4141N P2P RCA Pin
D738	ED - 811455J	D SILICON H 1SS133T-77 T26	32 EJ - 821000X	PHONE J YKB26-5264 S.NUT 6.3 Stereo Out
D739	ED - 811455J	D SILICON H 1SS133T-77 T26	33 EJ - 821273X	
		D SILICON H 188133T-77 T26		PHONE J YKB26-5326 S.NUT 6.3 Rec In
D740	ED - 811455J		34 EJ - 821000X	PHONE J YKB26-5264 S.NUT 6.3 8 para
D741	ED - 811455J	D SILICON H 1SS133T-77 T26	35 EJ - 427801J	DIN J TCS5084-45-4151 5P MIDI
D742	ED - 811455J	D SILICON H 1SS133T-77 T26	36 SP - 822293X	COVER FRONT
D743	ED - 811455J	D SILICON H 1SS133T-77 T26	37 SP - 822300X	COVER CD BLANK
	MH - 322581X	PC SUPPORT MCBS-5P	38 SP - 822334X	PANEL SLOT (B)
			39 ZS - 822429X	CTS30X06STL BZN
12. PC OPE	FRATION-I		40 EJ - 821386X	PHONE J YKB22-5264 NUT 6.3
Ref. No.	Part No.	Description	41 ▲ BP - 822391X	SW POW SNP-9541-M1
D768	ED - 822379X	D LED L-169XSURDK RED		
			42 EW - 822369X	CORD FFC P0.50 L220 42P
D769	ED - 822379X	D LED L-169XSURDK RED	43 EW - 822368X	CORD FFC P0.50 L170 42P
D770	ED - 822379X	D LED L-169XSURDK RED	44 ZS - 822428X	N20STL NI3 2
D771	ED - 822379X	D LED L-169XSURDK RED	45 ZS - 356861	PAN20X06STL NI3
P703	EJ - 822715X	PLUG JM24181-R6 WHT 6P	46 EJ - 822406X	SOCKET ACCE EJECT CFHP-00-0023
SW744	ES - 415015J	SW TACT SKQEAD	47 EW - 822367X	CORD FFC P0.50 L60 42P
SW745	ES - 415015J	SW TACT SKQEAD		
			48 SE - 822401X	PAD TW-LG
SW746	ES - 349474	SW TACT SKHHAM004A	49 BA - 379695J1	PC PAD SENSOR
SW747	ES - 349474	SW TACT SKHHAM004A	50 SE - 821143X	SHEET FFC
SW748	ES - 349474	SW TACT SKHHAM004A	51 EW - 822370X	CORD FFC P1.00 L100 26P
SW749	ES - 349474	SW TACT SKHHAM004A	52 SB - 822298X	BUTTON PUSH M (A) Clear
VR703	EV - 822423X	VR SLIDE RF45112P6 L15 B103X2	ES - 349474	SW TACT SKHHAM004A
VR704	EV - 822423X	VR SLIDE RF45112P6 L15 B103X2	53 SB - 822299X	BUTTON PUSH M (B) White
VR705	EV - 822377X	VR ROTARY RD14K12D L20 3B103X2	ES - 349474	• •
	EV - 822377X			SW TACT SKHHAM004A
VR706		VR ROTARY RD14K12D L20 3B103X2	54 SB - 822333X	BUTTON PUSH B (7) Red
D744	ED - 811455J	D SILICON H 1SS133T-77 T26	ES - 415015J	SW TACT SKQEAD
D745	ED - 811455J	D SILICON H 1SS133T-77 T26	55 SB - 821897X	BUTTON PUSH B (6) White
D746	ED - 811455J	D SILICON H 1SS133T-77 T26	ES - 415015J	SW TACT SKQEAD
D747	ED - 811455J	D SILICON H 1SS133T-77 T26	56 SB - 822331X	BUTTON PUSH (B)-8 Gray
D748	ED - 811455J	D SILICON H 1SS133T-77 T26	ES - 349474	SW TACT SKHHAM004A
D749	ED - 811455J	D SILICON H 1SS133T-77 T26	57 SB - 822330X	BUTTON PUSH (B)-7 White
D1 10	MH - 322581X	PC SUPPORT MCBS-5P		, ,
	WIII - 322301X	FC 30FFORT MOD3-3F	ES - 349474	SW TACT SKHHAM004A
			58 SB - 822307X	BUTTON CURSOR (5) Gray
13. PC OPE			ES - 349474	SW TACT SKHHAM004A
Ref. No.	Part No.	Description	59 SK - 822297X	KNOB JOG
SW750	ES - 349474	SW TACT SKHHAM004A	ES - 822352X	SW R.ENCORDER SRGPSJ0500
SW751	ES - 349474	SW TACT SKHHAM004A	60 SE - 822579X	MASK VR
SW752				
	ES - 349474	SW TACT SKHHAM004A	61 SP - 822288X	PANEL TOP MPC2500
SW753	ES - 349474	SW TACT SKHHAM004A SW TACT SKHHAM004A	61 SP - 822288X 62 SF - 8103531	PANEL TOP MPC2500
SW753 SW754	ES - 349474 ES - 349474	SW TACT SKHHAM004A	62 SE - 810353J	LENS LED
SW754	ES - 349474 ES - 349474 ES - 349474	SW TACT SKHHAM004A SW TACT SKHHAM004A	62 SE - 810353J 63 SP - 822289X	LENS LED PANEL SIDE (L)
SW754 SW755	ES - 349474 ES - 349474 ES - 349474 ES - 349474	SW TACT SKHHAM004A SW TACT SKHHAM004A SW TACT SKHHAM004A	62 SE - 810353J 63 SP - 822289X 64 SP - 822290X	LENS LED PANEL SIDE (L) PANEL SIDE (R)
SW754 SW755 D750	ES - 349474 ES - 349474 ES - 349474 ES - 349474 ED - 811455J	SW TACT SKHHAM004A SW TACT SKHHAM004A SW TACT SKHHAM004A D SILICON H 1SS133T-77 T26	62 SE - 810353J 63 SP - 822289X 64 SP - 822290X 65 ZS - 822727X	LENS LED PANEL SIDE (L) PANEL SIDE (R) BT CTS30X06STL BZN
SW754 SW755 D750 D751	ES - 349474 ES - 349474 ES - 349474 ES - 349474 ED - 811455J ED - 811455J	SW TACT SKHHAM004A SW TACT SKHHAM004A SW TACT SKHHAM004A D SILICON H 1SS133T-77 T26 D SILICON H 1SS133T-77 T26	62 SE - 810353J 63 SP - 822289X 64 SP - 822290X 65 ZS - 822727X 66 ZS - 404225J	LENS LED PANEL SIDE (L) PANEL SIDE (R) BT CTS30X06STL BZN ST BID40X08STL BZN
SW754 SW755 D750 D751 D752	ES - 349474 ES - 349474 ES - 349474 ES - 349474 ED - 811455J ED - 811455J	SW TACT SKHHAM004A SW TACT SKHHAM004A SW TACT SKHHAM004A D SILICON H 1SS133T-77 T26 D SILICON H 1SS133T-77 T26 D SILICON H 1SS133T-77 T26	62 SE - 810353J 63 SP - 822289X 64 SP - 822290X 65 ZS - 822727X 66 ZS - 404225J 67 ZS - 417137	LENS LED PANEL SIDE (L) PANEL SIDE (R) BT CTS30X06STL BZN ST BID40X08STL BZN BID30X04STL CMT for HD
SW754 SW755 D750 D751 D752 D753	ES - 349474 ES - 349474 ES - 349474 ED - 811455J ED - 811455J ED - 811455J ED - 811455J	SW TACT SKHHAM004A SW TACT SKHHAM004A SW TACT SKHHAM004A D SILICON H 1SS133T-77 T26	62 SE - 810353J 63 SP - 822289X 64 SP - 822290X 65 ZS - 822727X 66 ZS - 404225J	LENS LED PANEL SIDE (L) PANEL SIDE (R) BT CTS30X06STL BZN ST BID40X08STL BZN
SW754 SW755 D750 D751 D752	ES - 349474 ES - 349474 ES - 349474 ES - 349474 ED - 811455J ED - 811455J	SW TACT SKHHAM004A SW TACT SKHHAM004A SW TACT SKHHAM004A D SILICON H 1SS133T-77 T26 D SILICON H 1SS133T-77 T26 D SILICON H 1SS133T-77 T26	62 SE - 810353J 63 SP - 822289X 64 SP - 822290X 65 ZS - 822727X 66 ZS - 404225J 67 ZS - 417137	LENS LED PANEL SIDE (L) PANEL SIDE (R) BT CTS30X06STL BZN ST BID40X08STL BZN BID30X04STL CMT for HD
SW754 SW755 D750 D751 D752 D753	ES - 349474 ES - 349474 ES - 349474 ED - 811455J ED - 811455J ED - 811455J ED - 811455J	SW TACT SKHHAM004A SW TACT SKHHAM004A SW TACT SKHHAM004A D SILICON H 1SS133T-77 T26	62 SE - 810353J 63 SP - 822289X 64 SP - 822290X 65 ZS - 8222727X 66 ZS - 404225J 67 ZS - 417137 68 SP - 822269X	LENS LED PANEL SIDE (L) PANEL SIDE (R) BT CTS30X06STL BZN ST BID40X08STL BZN BID30X04STL CMT for HD COVER BOTTOM
SW754 SW755 D750 D751 D752 D753 D754	ES - 349474 ES - 349474 ES - 349474 ES - 349474 ED - 811455J	SW TACT SKHHAM004A SW TACT SKHHAM004A SW TACT SKHHAM004A D SILICON H 1SS133T-77 T26	62 SE - 810353J 63 SP - 822289X 64 SP - 822290X 65 ZS - 822727X 66 ZS - 404225J 67 ZS - 417137 68 SP - 822269X 69 SP - 821799X	LENS LED PANEL SIDE (L) PANEL SIDE (R) BT CTS30X06STL BZN ST BID40X08STL BZN BID30X04STL CMT for HD COVER BOTTOM COVER MEMORY FOOT B
SW754 SW755 D750 D751 D752 D753 D754 D755	ES - 349474 ES - 349474 ES - 349474 ES - 349474 ED - 811455J	SW TACT SKHHAM004A SW TACT SKHHAM004A SW TACT SKHHAM004A D SILICON H 1SS133T-77 T26	62 SE - 810353J 63 SP - 822289X 64 SP - 822290X 65 ZS - 822727X 66 ZS - 404225J 67 ZS - 417137 68 SP - 822269X 69 SP - 821799X 70 SA - 812668J 71 SK - 822308X	LENS LED PANEL SIDE (L) PANEL SIDE (R) BT CTS30X06STL BZN ST BID40X08STL BZN BID30X04STL CMT for HD COVER BOTTOM COVER MEMORY FOOT B KNOB VOL PART (17) Red
SW754 SW755 D750 D751 D752 D753 D754 D755	ES - 349474 ES - 349474 ES - 349474 ES - 349474 ED - 811455J ASSENBLY BLK	SW TACT SKHHAM004A SW TACT SKHHAM004A SW TACT SKHHAM004A D SILICON H 1SS133T-77 T26	62 SE - 810353J 63 SP - 822289X 64 SP - 822290X 65 ZS - 822727X 66 ZS - 404225J 67 ZS - 417137 68 SP - 822269X 69 SP - 821799X 70 SA - 812668J 71 SK - 822308X EV - 822422X	LENS LED PANEL SIDE (L) PANEL SIDE (R) BT CTS30X06STL BZN ST BID40X08STL BZN BID30X04STL CMT for HD COVER BOTTOM COVER MEMORY FOOT B KNOB VOL PART (17) Red VR ROTARY RD14K12D L20 C203X2
SW754 SW755 D750 D751 D752 D753 D754 D755	ES - 349474 ES - 349474 ES - 349474 ES - 349474 ED - 811455J	SW TACT SKHHAM004A SW TACT SKHHAM004A SW TACT SKHHAM004A D SILICON H 1SS133T-77 T26	62 SE - 810353J 63 SP - 822289X 64 SP - 822290X 65 ZS - 822727X 66 ZS - 404225J 67 ZS - 417137 68 SP - 822269X 69 SP - 821799X 70 SA - 812668J 71 SK - 822308X EV - 822422X 72 SK - 822311X	LENS LED PANEL SIDE (L) PANEL SIDE (R) BT CTS30X06STL BZN ST BID40X08STL BZN BID30X04STL CMT for HD COVER BOTTOM COVER MEMORY FOOT B KNOB VOL PART (17) Red VR ROTARY RD14K12D L20 C203X2 KNOB VOL PART (18) Silver
SW754 SW755 D750 D751 D752 D753 D754 D755 14. FINAL A Ref. No.	ES - 349474 ES - 349474 ES - 349474 ES - 349474 ED - 811455J ED - 82525	SW TACT SKHHAM004A SW TACT SKHHAM004A SW TACT SKHHAM004A D SILICON H 1SS133T-77 T26	62 SE - 810353J 63 SP - 822289X 64 SP - 822290X 65 ZS - 822727X 66 ZS - 404225J 67 ZS - 417137 68 SP - 822269X 69 SP - 821799X 70 SA - 812668J 71 SK - 82230X EV - 822422X 72 SK - 822311X EV - 822377X	LENS LED PANEL SIDE (L) PANEL SIDE (R) BT CTS30X06STL BZN ST BID40X08STL BZN BID30X04STL CMT for HD COVER BOTTOM COVER MEMORY FOOT B KNOB VOL PART (17) Red VR ROTARY RD14K12D L20 C203X2 KNOB VOL PART (18) Silver VR ROTARY RD14K12D L20 3B103X2
SW754 SW755 D750 D751 D752 D753 D754 D755 14. FINAL A Ref. No.	ES - 349474 ES - 349474 ES - 349474 ES - 349474 ED - 811455J ED - 82528	SW TACT SKHHAM004A SW TACT SKHHAM004A SW TACT SKHHAM004A D SILICON H 1SS133T-77 T26 WILLON H 1SS133T-77 T26 D SILICON H 1SS133T-77 T26 D SILICON H 1SS133T-77 T26	62 SE - 810353J 63 SP - 822289X 64 SP - 822290X 65 ZS - 822727X 66 ZS - 404225J 67 ZS - 417137 68 SP - 822269X 69 SP - 821799X 70 SA - 812668J 71 SK - 822308X EV - 822422X 72 SK - 822311X EV - 822377X 73 SK - 822313X	LENS LED PANEL SIDE (L) PANEL SIDE (R) BT CTS30X06STL BZN ST BID40X08STL BZN BID30X04STL CMT for HD COVER BOTTOM COVER MEMORY FOOT B KNOB VOL PART (17) Red VR ROTARY RD14K12D L20 C203X2 KNOB VOL PART (18) Silver VR ROTARY RD14K12D L20 3B103X2 KNOB VOL PART (19) Black
SW754 SW755 D750 D751 D752 D753 D754 D755 14. FINAL A Ref. No.	ES - 349474 ES - 349474 ES - 349474 ES - 349474 ED - 811455J ED - 81259J ASSENBLY BLK Part No. SP - 822292X SP - 822296X EM - 822661X	SW TACT SKHHAM004A SW TACT SKHHAM004A SW TACT SKHHAM004A D SILICON H 1SS133T-77 T26 USLICON H 1SS133T-77 T26 D SILICON H 1SS133T-77 T26	62 SE - 810353J 63 SP - 822289X 64 SP - 822290X 65 ZS - 822727X 66 ZS - 417137 68 SP - 822269X 69 SP - 821799X 70 SA - 812668J 71 SK - 822308X EV - 822311X EV - 822317X 73 SK - 822313X EV - 822377X	LENS LED PANEL SIDE (L) PANEL SIDE (R) BT CTS30X06STL BZN ST BID40X08STL BZN ST BID40X08STL BZN BID30X04STL CMT for HD COVER BOTTOM COVER MEMORY FOOT B KNOB VOL PART (17) Red VR ROTARY RD14K12D L20 C203X2 KNOB VOL PART (18) Silver VR ROTARY RD14K12D L20 3B103X2 KNOB VOL PART (19) Black VR ROTARY RD14K12D L20 3B103X2
SW754 SW755 D750 D751 D752 D753 D754 D755 14. FINAL A Ref. No.	ES - 349474 ES - 349474 ES - 349474 ES - 349474 ED - 811455J ED - 81255J ED - 822292X SP - 822296X EM - 822661X EW - 822353X	SW TACT SKHHAM004A SW TACT SKHHAM004A SW TACT SKHHAM004A D SILICON H 1SS133T-77 T26 USLICON H 1SS133T-77 T26 DEscription PANEL LCD WINDOW LCD IND LCD BY-MG24064DLYS-02H WIRE ASSY L4039 W105 24P	62 SE - 810353J 63 SP - 822289X 64 SP - 822290X 65 ZS - 822727X 66 ZS - 404225J 67 ZS - 417137 68 SP - 822269X 69 SP - 821799X 70 SA - 812668J 71 SK - 822308X EV - 822422X 72 SK - 822311X EV - 822377X 73 SK - 822313X	LENS LED PANEL SIDE (L) PANEL SIDE (R) BT CTS30X06STL BZN ST BID40X08STL BZN BID30X04STL CMT for HD COVER BOTTOM COVER MEMORY FOOT B KNOB VOL PART (17) Red VR ROTARY RD14K12D L20 C203X2 KNOB VOL PART (18) Silver VR ROTARY RD14K12D L20 3B103X2 KNOB VOL PART (19) Black VR ROTARY RD14K12D L20 3B103X2 SPACER SLIDE
SW754 SW755 D750 D751 D752 D753 D754 D755 14. FINAL A Ref. No.	ES - 349474 ES - 349474 ES - 349474 ES - 349474 ED - 811455J ED - 81259J ASSENBLY BLK Part No. SP - 822292X SP - 822296X EM - 822661X	SW TACT SKHHAM004A SW TACT SKHHAM004A SW TACT SKHHAM004A D SILICON H 1SS133T-77 T26 USLICON H 1SS133T-77 T26 D SILICON H 1SS133T-77 T26	62 SE - 810353J 63 SP - 822289X 64 SP - 822290X 65 ZS - 822727X 66 ZS - 417137 68 SP - 822269X 69 SP - 821799X 70 SA - 812668J 71 SK - 822308X EV - 822311X EV - 822317X 73 SK - 822313X EV - 822377X	LENS LED PANEL SIDE (L) PANEL SIDE (R) BT CTS30X06STL BZN ST BID40X08STL BZN ST BID40X08STL BZN BID30X04STL CMT for HD COVER BOTTOM COVER MEMORY FOOT B KNOB VOL PART (17) Red VR ROTARY RD14K12D L20 C203X2 KNOB VOL PART (18) Silver VR ROTARY RD14K12D L20 3B103X2 KNOB VOL PART (19) Black VR ROTARY RD14K12D L20 3B103X2
SW754 SW755 D750 D751 D752 D753 D754 D755 14. FINAL A Ref. No.	ES - 349474 ES - 349474 ES - 349474 ES - 349474 ED - 811455J ED - 81255J ED - 822292X SP - 822296X EM - 822661X EW - 822353X	SW TACT SKHHAM004A SW TACT SKHHAM004A SW TACT SKHHAM004A D SILICON H 1SS133T-77 T26 USLICON H 1SS133T-77 T26 DEscription PANEL LCD WINDOW LCD IND LCD BY-MG24064DLYS-02H WIRE ASSY L4039 W105 24P	62 SE - 810353J 63 SP - 822289X 64 SP - 822290X 65 ZS - 822727X 66 ZS - 404225J 67 ZS - 417137 68 SP - 822269X 69 SP - 821799X 70 SA - 812668J 71 SK - 822308X EV - 822371X EV - 822377X 73 SK - 822313X EV - 822377X 74 SK - 821679X	LENS LED PANEL SIDE (L) PANEL SIDE (R) BT CTS30X06STL BZN ST BID40X08STL BZN BID30X04STL CMT for HD COVER BOTTOM COVER MEMORY FOOT B KNOB VOL PART (17) Red VR ROTARY RD14K12D L20 C203X2 KNOB VOL PART (18) Silver VR ROTARY RD14K12D L20 3B103X2 KNOB VOL PART (19) Black VR ROTARY RD14K12D L20 3B103X2 SPACER SLIDE
SW754 SW755 D750 D751 D752 D753 D754 D755 14. FINAL A Ref. No.	ES - 349474 ES - 349474 ES - 349474 ES - 349474 ED - 811455J ASSENBLY BLK Part No. SP - 822292X SP - 822296X EM - 822266X EW - 822353X SZ - 821800X	SW TACT SKHHAM004A SW TACT SKHHAM004A SW TACT SKHHAM004A D SILICON H 1SS133T-77 T26 WINDOW LCD LCD WINDOW LCD IND LCD BY-MG24064DLYS-02H WIRE ASSY L4039 W105 24P SHIELD LCD(1)	62 SE - 810353J 63 SP - 822289X 64 SP - 822290X 65 ZS - 822727X 66 ZS - 404225J 67 ZS - 417137 68 SP - 822269X 69 SP - 821799X 70 SA - 812668J 71 SK - 822311X EV - 822377X 73 SK - 822313X EV - 822377X 74 SK - 821679X 75 SK - 822332X EV - 822332X EV - 822332X EV - 822332X	LENS LED PANEL SIDE (L) PANEL SIDE (R) BT CTS30X06STL BZN ST BID40X08STL BZN BID30X04STL CMT for HD COVER BOTTOM COVER MEMORY FOOT B KNOB VOL PART (17) Red VR ROTARY RD14K12D L20 C203X2 KNOB VOL PART (18) Silver VR ROTARY RD14K12D L20 3B103X2 KNOB VOL PART (19) Black VR ROTARY RD14K12D L20 3B103X2 SPACER SLIDE KNOB SLIDE (E) VR SLIDE RF45112P6 L15 B103X2
SW754 SW755 D750 D751 D752 D753 D754 D755 14. FINAL A Ref. No. 1 2 3 4 5 6 7	ES - 349474 ES - 349474 ES - 349474 ES - 349474 ED - 811455J ED - 81295J ASSENBLY BLK Part No. SP - 822292X SP - 822292X SP - 822296X EM - 822661X EW - 822661X EW - 8221801X SZ - 821801X SP - 822291X	SW TACT SKHHAM004A SW TACT SKHHAM004A SW TACT SKHHAM004A D SILICON H 1SS133T-77 T26 WINDOW LCD Description PANEL LCD WINDOW LCD IND LCD BY-MG24064DLYS-02H WIRE ASSY L4039 W105 24P SHIELD LCD(1) SHIELD LCD(2) PANEL LCD BOTTOM	62 SE - 810353J 63 SP - 822289X 64 SP - 822290X 65 ZS - 822727X 66 ZS - 404225J 67 ZS - 417137 68 SP - 822269X 69 SP - 821799X 70 SA - 812668J 71 SK - 82230X EV - 822377X 73 SK - 822311X EV - 822377X 74 SK - 822377X 75 SK - 822332X EV - 822332X EV - 82232X EV - 822423X 76 \(\triangle	LENS LED PANEL SIDE (L) PANEL SIDE (R) BT CTS30X06STL BZN ST BID40X08STL BZN BID30X04STL CMT for HD COVER BOTTOM COVER MEMORY FOOT B KNOB VOL PART (17) Red VR ROTARY RD14K12D L20 C203X2 KNOB VOL PART (18) Silver VR ROTARY RD14K12D L20 3B103X2 KNOB VOL PART (19) Black VR ROTARY RD14K12D L20 3B103X2 SPACER SLIDE KNOB SLIDE (E) VR SLIDE RF45112P6 L15 B103X2 AC CORD 250SSP30IS14 A J
SW754 SW755 D750 D751 D752 D753 D754 D755 14. FINAL A Ref. No. 1 2 3 4 5 6 7 8	ES - 349474 ES - 349474 ES - 349474 ES - 349474 ED - 811455J ED - 82292X SP - 822292X SP - 822296X EM - 822353X SZ - 821800X SZ - 821801X SP - 822291X SP - 822291X SP - 822291X SP - 822295X	SW TACT SKHHAM004A SW TACT SKHHAM004A SW TACT SKHHAM004A D SILICON H 1SS133T-77 T26 PANEL LCD WINDOW LCD IND LCD BY-MG24064DLYS-02H WIRE ASSY L4039 W105 24P SHIELD LCD(1) SHIELD LCD(2) PANEL LCD BOTTOM PLATE LCD BOTTOM	62 SE - 810353J 63 SP - 822289X 64 SP - 822290X 65 ZS - 822727X 66 ZS - 404225J 67 ZS - 417137 68 SP - 822269X 69 SP - 821799X 70 SA - 812668J 71 SK - 822308X EV - 82231X EV - 822377X 73 SK - 82231X EV - 822377X 74 SK - 822377X 75 SK - 822332X EV - 82232X F - 822332X EV - 822332X EV - 822332X EV - 822664X 76 \(\triangle \tr	LENS LED PANEL SIDE (L) PANEL SIDE (R) BT CTS30X06STL BZN ST BID40X08STL BZN BID30X04STL CMT for HD COVER BOTTOM COVER MEMORY FOOT B KNOB VOL PART (17) Red VR ROTARY RD14K12D L20 C203X2 KNOB VOL PART (18) Silver VR ROTARY RD14K12D L20 3B103X2 KNOB VOL PART (19) Black VR ROTARY RD14K12D L20 3B103X2 SPACER SLIDE KNOB SLIDE (E) VR SLIDE RF45112P6 L15 B103X2 AC CORD 250SSP301S14 A J AC CORD 200SSP301IS14 A AC
SW754 SW755 D750 D751 D752 D753 D754 D755 14. FINAL A Ref. No. 1 2 3 4 5 6 7 8	ES - 349474 ES - 349474 ES - 349474 ES - 349474 ED - 811455J ED - 81255J ASSENBLY BLK Part No. SP - 822292X SP - 822296X EM - 822296X EM - 822353X SZ - 821800X SZ - 821800X SZ - 821800X SZ - 821801X SP - 822291X SP - 822291X SP - 822295X ZS - 394414J	SW TACT SKHHAM004A SW TACT SKHHAM004A SW TACT SKHHAM004A D SILICON H 1SS133T-77 T26 PANEL LCD WINDOW LCD IND LCD BY-MG24064DLYS-02H WIRE ASSY L4039 W105 24P SHIELD LCD(1) SHIELD LCD(2) PANEL LCD BOTTOM PLATE LCD BOTTOM BT BID30X08STL BZN	62 SE - 810353J 63 SP - 822289X 64 SP - 822289X 65 ZS - 822727X 66 ZS - 404225J 67 ZS - 417137 68 SP - 822269X 69 SP - 821799X 70 SA - 812668J 71 SK - 822303X EV - 822311X EV - 822377X 73 SK - 822313X EV - 822377X 74 SK - 822377X 75 SK - 82233X EV - 822422X 76 \(\triangle \t	LENS LED PANEL SIDE (L) PANEL SIDE (R) BT CTS30X06STL BZN ST BID40X08STL BZN SI BID30X04STL CMT for HD COVER BOTTOM COVER MEMORY FOOT B KNOB VOL PART (17) Red VR ROTARY RD14K12D L20 C203X2 KNOB VOL PART (18) Silver VR ROTARY RD14K12D L20 3B103X2 KNOB VOL PART (19) Black VR ROTARY RD14K12D L20 3B103X2 SPACER SLIDE KNOB SLIDE (E) VR SLIDE R45112P6 L15 B103X2 AC CORD 250SSP30IS14 A J AC CORD 200SSP30IIS14 A AC AC CORD 183SLP33LS60 A E
SW754 SW755 D750 D751 D752 D753 D754 D755 14. FINAL A Ref. No. 1 2 3 4 5 6 7 8 9 10	ES - 349474 ES - 349474 ES - 349474 ES - 349474 ED - 811455J ED - 811455J ED - 811455J ED - 811455J ASSENBLY BLK Part No. SP - 822292X SP - 822296X EM - 822661X EW - 822353X SZ - 821800X SZ - 821800X SZ - 821801X SP - 822291X SP - 822295X SZ - 394414J ZG - 822279X	SW TACT SKHHAM004A SW TACT SKHHAM004A SW TACT SKHHAM004A D SILICON H 1SS133T-77 T26 Description PANEL LCD WINDOW LCD IND LCD BY-MG24064DLYS-02H WIRE ASSY L4039 W105 24P SHIELD LCD(1) SHIELD LCD(1) SHIELD LCD(2) PANEL LCD BOTTOM PLATE LCD BOTTOM BT BID30X08STL BZN BUSH PANEL LCD	62 SE - 810353J 63 SP - 822289X 64 SP - 822289X 65 ZS - 822727X 66 ZS - 40725J 67 ZS - 417137 68 SP - 822269X 69 SP - 821799X 70 SA - 812668J 71 SK - 822308X EV - 822311X EV - 822317X 72 SK - 822313X EV - 822317X 73 SK - 822313X EV - 822377X 74 SK - 822377X 75 SK - 822332X EV - 822423X 76 A EW - 822665X 76 A EW - 822665X 76 A EW - 822666X 76 A EW - 822666X	LENS LED PANEL SIDE (L) PANEL SIDE (R) BT CTS30X06STL BZN ST BID40X08STL BZN ST BID40X08STL BZN BID30X04STL CMT for HD COVER BOTTOM COVER MEMORY FOOT B KNOB VOL PART (17) Red VR ROTARY RD14K12D L20 C203X2 KNOB VOL PART (18) Silver VR ROTARY RD14K12D L20 3B103X2 KNOB VOL PART (19) Black VR ROTARY RD14K12D L20 3B103X2 SPACER SLIDE KNOB SLIDE (E) VR SLIDE RF45112P6 L15 B103X2 AC CORD 250SSP301IS14 A J AC CORD 200SSP301IS14 A AC AC CORD 183SLP33LS60 A E AC CORD 200SSP60IS14 A B
SW754 SW755 D750 D751 D752 D753 D754 D755 14. FINAL A Ref. No. 1 2 3 4 5 6 7 8 9 10 11	ES - 349474 ES - 349474 ES - 349474 ES - 349474 ED - 811455J ED - 812292X ASSENBLY BLK Part No. SP - 822292X SP - 822296X EM - 822296X EM - 822296X EM - 822353X SZ - 821800X SZ - 821800X SZ - 821801X SP - 822291X SP - 822291X SP - 822291X SP - 822295X ZS - 394414J ZG - 822279X MB - 822279X	SW TACT SKHHAM004A SW TACT SKHHAM004A SW TACT SKHHAM004A D SILICON H 1SS133T-77 T26 D SILICON H 1SS133T-77 T26 Description PANEL LCD WINDOW LCD IND LCD BY-MG24064DLYS-02H WIRE ASSY L4039 W105 24P SHIELD LCD(1) SHIELD LCD(2) PANEL LCD BOTTOM PLATE LCD BOTTOM BT BID30X08STL BZN BUSH PANEL LCD CUSHION RUBBER	62 SE - 810353J 63 SP - 822289X 64 SP - 822290X 65 ZS - 822727X 66 ZS - 404225J 67 ZS - 417137 68 SP - 822269X 69 SP - 821799X 70 SA - 812668J 71 SK - 822311X EV - 822311X EV - 822377X 73 SK - 822313X EV - 822377X 74 SK - 822377X 75 SK - 822332X EV - 82242X 76 △ EW - 822665X 76 △ EW - 8226667X 76 △ EW - 822667X 76 △ EW - 822667X 76 △ EW - 822667X	LENS LED PANEL SIDE (L) PANEL SIDE (R) BT CTS30X06STL BZN ST BID40X08STL BZN BID30X04STL CMT for HD COVER BOTTOM COVER MEMORY FOOT B KNOB VOL PART (17) Red VR ROTARY RD14K12D L20 C203X2 KNOB VOL PART (18) Silver VR ROTARY RD14K12D L20 3B103X2 KNOB VOL PART (19) Black VR ROTARY RD14K12D L20 3B103X2 KNOB VOL PART (19) Black VR ROTARY RD14K12D L20 3B103X2 SPACER SLIDE KNOB SLIDE (E) VR SLIDE RF45112P6 L15 B103X2 AC CORD 250SSP301S14 A J AC CORD 183SLP33LS60 A E AC CORD 200SSP60IS14 A B AC CORD 180SSP502BIS14 A S
SW754 SW755 D750 D751 D752 D753 D754 D755 14. FINAL A Ref. No. 1 2 3 4 5 6 7 8 9 10 11 12	ES - 349474 ES - 349474 ES - 349474 ES - 349474 ED - 811455J ED - 812292X ASSENBLY BLK Part No. SP - 822292X SP - 822296X EM - 822661X EW - 822353X SZ - 821800X SZ - 821800X SZ - 821800X SZ - 821801X SP - 822295X SP - 822295X SP - 822295X SZ - 821801X SP - 822295X SP - 822279X MB - 822278X	SW TACT SKHHAM004A SW TACT SKHHAM004A SW TACT SKHHAM004A D SILICON H 1SS133T-77 T26 Description PANEL LCD WINDOW LCD IND LCD BY-MG24064DLYS-02H WIRE ASSY L4039 W105 24P SHIELD LCD(1) SHIELD LCD(2) PANEL LCD BOTTOM PLATE LCD BOTTOM BT BID30X08STL BZN BUSH PANEL LCD CUSHION RUBBER LEVER	62 SE - 810353J 63 SP - 822289X 64 SP - 822289X 65 ZS - 822727X 66 ZS - 40725J 67 ZS - 417137 68 SP - 822269X 69 SP - 821799X 70 SA - 812668J 71 SK - 822308X EV - 822311X EV - 822317X 72 SK - 822313X EV - 822317X 73 SK - 822313X EV - 822377X 74 SK - 822377X 75 SK - 822332X EV - 822423X 76 A EW - 822665X 76 A EW - 822665X 76 A EW - 822666X 76 A EW - 822666X	LENS LED PANEL SIDE (L) PANEL SIDE (R) BT CTS30X06STL BZN ST BID40X08STL BZN ST BID40X08STL BZN BID30X04STL CMT for HD COVER BOTTOM COVER MEMORY FOOT B KNOB VOL PART (17) Red VR ROTARY RD14K12D L20 C203X2 KNOB VOL PART (18) Silver VR ROTARY RD14K12D L20 3B103X2 KNOB VOL PART (19) Black VR ROTARY RD14K12D L20 3B103X2 SPACER SLIDE KNOB SLIDE (E) VR SLIDE RF45112P6 L15 B103X2 AC CORD 250SSP301IS14 A J AC CORD 200SSP301IS14 A AC AC CORD 183SLP33LS60 A E AC CORD 200SSP60IS14 A B
SW754 SW755 D750 D751 D752 D753 D754 D755 14. FINAL A Ref. No. 1 2 3 4 5 6 7 8 9 10 11	ES - 349474 ES - 349474 ES - 349474 ES - 349474 ED - 811455J ED - 812292X ASSENBLY BLK Part No. SP - 822292X SP - 822296X EM - 822296X EM - 822296X EM - 822353X SZ - 821800X SZ - 821800X SZ - 821801X SP - 822291X SP - 822291X SP - 822291X SP - 822295X ZS - 394414J ZG - 822279X MB - 822279X	SW TACT SKHHAM004A SW TACT SKHHAM004A SW TACT SKHHAM004A D SILICON H 1SS133T-77 T26 D SILICON H 1SS133T-77 T26 Description PANEL LCD WINDOW LCD IND LCD BY-MG24064DLYS-02H WIRE ASSY L4039 W105 24P SHIELD LCD(1) SHIELD LCD(2) PANEL LCD BOTTOM PLATE LCD BOTTOM BT BID30X08STL BZN BUSH PANEL LCD CUSHION RUBBER	62 SE - 810353J 63 SP - 822289X 64 SP - 822290X 65 ZS - 822727X 66 ZS - 404225J 67 ZS - 417137 68 SP - 822269X 69 SP - 821799X 70 SA - 812668J 71 SK - 822311X EV - 822311X EV - 822377X 73 SK - 822313X EV - 822377X 74 SK - 822377X 75 SK - 822332X EV - 82242X 76 △ EW - 822665X 76 △ EW - 8226667X 76 △ EW - 822667X 76 △ EW - 822667X 76 △ EW - 822667X	LENS LED PANEL SIDE (L) PANEL SIDE (R) BT CTS30X06STL BZN ST BID40X08STL BZN BID30X04STL CMT for HD COVER BOTTOM COVER MEMORY FOOT B KNOB VOL PART (17) Red VR ROTARY RD14K12D L20 C203X2 KNOB VOL PART (18) Silver VR ROTARY RD14K12D L20 3B103X2 KNOB VOL PART (19) Black VR ROTARY RD14K12D L20 3B103X2 KNOB VOL PART (19) Black VR ROTARY RD14K12D L20 3B103X2 SPACER SLIDE KNOB SLIDE (E) VR SLIDE RF45112P6 L15 B103X2 AC CORD 250SSP301S14 A J AC CORD 183SLP33LS60 A E AC CORD 200SSP60IS14 A B AC CORD 180SSP502BIS14 A S
SW754 SW755 D750 D751 D752 D753 D754 D755 14. FINAL A Ref. No. 1 2 3 4 5 6 7 8 9 10 11 12	ES - 349474 ES - 349474 ES - 349474 ES - 349474 ED - 811455J ED - 812292X ASSENBLY BLK Part No. SP - 822292X SP - 822296X EM - 822661X EW - 822353X SZ - 821800X SZ - 821800X SZ - 821800X SZ - 821801X SP - 822295X SP - 822295X SP - 822295X SZ - 821801X SP - 822295X SP - 822279X MB - 822278X	SW TACT SKHHAM004A SW TACT SKHHAM004A SW TACT SKHHAM004A D SILICON H 1SS133T-77 T26 Description PANEL LCD WINDOW LCD IND LCD BY-MG24064DLYS-02H WIRE ASSY L4039 W105 24P SHIELD LCD(1) SHIELD LCD(2) PANEL LCD BOTTOM PLATE LCD BOTTOM BT BID30X08STL BZN BUSH PANEL LCD CUSHION RUBBER LEVER	62 SE - 810353J 63 SP - 822289X 64 SP - 822290X 65 ZS - 822727X 66 ZS - 404225J 67 ZS - 417137 68 SP - 822269X 69 SP - 821799X 70 SA - 812668J 71 SK - 822311X EV - 822311X EV - 822377X 73 SK - 822313X EV - 822377X 74 SK - 822377X 75 SK - 822332X EV - 82242X 76 △ EW - 822665X 76 △ EW - 8226667X 76 △ EW - 822667X 76 △ EW - 822667X 76 △ EW - 822667X	LENS LED PANEL SIDE (L) PANEL SIDE (R) BT CTS30X06STL BZN ST BID40X08STL BZN BID30X04STL CMT for HD COVER BOTTOM COVER MEMORY FOOT B KNOB VOL PART (17) Red VR ROTARY RD14K12D L20 C203X2 KNOB VOL PART (18) Silver VR ROTARY RD14K12D L20 3B103X2 KNOB VOL PART (19) Black VR ROTARY RD14K12D L20 3B103X2 KNOB VOL PART (19) Black VR ROTARY RD14K12D L20 3B103X2 SPACER SLIDE KNOB SLIDE (E) VR SLIDE RF45112P6 L15 B103X2 AC CORD 250SSP301S14 A J AC CORD 183SLP33LS60 A E AC CORD 200SSP60IS14 A B AC CORD 180SSP502BIS14 A S
SW754 SW755 D750 D751 D752 D753 D754 D755 14. FINAL A Ref. No. 1 2 3 4 5 6 7 8 9 10 11 12 13	ES - 349474 ES - 349474 ES - 349474 ES - 349474 ED - 811455J ED - 81292X ASSENBLY BLK Part No. SP - 822292X SP - 822296X EM - 822661X EW - 822661X EW - 822353X SZ - 821801X SP - 822291X SP - 822295X ZS - 394414J ZG - 822277X ZG - 822277X ZG - 822277X	SW TACT SKHHAM004A SW TACT SKHHAM004A SW TACT SKHHAM004A D SILICON H 1SS133T-77 T26 WINDOW LCD DEscription PANEL LCD WINDOW LCD IND LCD BY-MG24064DLYS-02H WIRE ASSY L4039 W105 24P SHIELD LCD(1) SHIELD LCD(2) PANEL LCD BOTTOM PLATE LCD BOTTOM BT BID30X08STL BZN BUSH PANEL LCD CUSHION RUBBER LEVER SP TORSION LEVER	62 SE - 810353J 63 SP - 822289X 64 SP - 822290X 65 ZS - 822727X 66 ZS - 404225J 67 ZS - 417137 68 SP - 822269X 69 SP - 821799X 70 SA - 812668J 71 SK - 822311X EV - 822311X EV - 822377X 73 SK - 822313X EV - 822377X 74 SK - 822377X 75 SK - 822332X EV - 82242X 76 △ EW - 822665X 76 △ EW - 8226667X 76 △ EW - 822667X 76 △ EW - 822667X 76 △ EW - 822667X	LENS LED PANEL SIDE (L) PANEL SIDE (R) BT CTS30X06STL BZN ST BID40X08STL BZN BID30X04STL CMT for HD COVER BOTTOM COVER MEMORY FOOT B KNOB VOL PART (17) Red VR ROTARY RD14K12D L20 C203X2 KNOB VOL PART (18) Silver VR ROTARY RD14K12D L20 3B103X2 KNOB VOL PART (19) Black VR ROTARY RD14K12D L20 3B103X2 KNOB VOL PART (19) Black VR ROTARY RD14K12D L20 3B103X2 SPACER SLIDE KNOB SLIDE (E) VR SLIDE RF45112P6 L15 B103X2 AC CORD 250SSP301S14 A J AC CORD 183SLP33LS60 A E AC CORD 200SSP60IS14 A B AC CORD 180SSP502BIS14 A S
SW754 SW755 D750 D751 D752 D753 D754 D755 14. FINAL A Ref. No. 1 2 3 4 5 6 7 8 9 10 11 12 13	ES - 349474 ES - 349474 ES - 349474 ES - 349474 ED - 811455J ED - 812292X SP - 822292X SP - 822296X EM - 822296X EM - 822261X EW - 822353X SZ - 821800X SZ - 821801X SP - 822291X SP - 822291X SP - 822291X SP - 822291X SP - 822295X ZS - 394414J ZG - 822277X ZG - 822281X MH - 820655X ZS - 428277J	SW TACT SKHHAM004A SW TACT SKHHAM004A SW TACT SKHHAM004A D SILICON H 1SS133T-77 T26 Description PANEL LCD WINDOW LCD IND LCD BY-MG24064DLYS-02H WIRE ASSY L4039 W105 24P SHIELD LCD(1) SHIELD LCD(2) PANEL LCD BOTTOM PLATE LCD BOTTOM BT BID30X08STL BZN BUSH PANEL LCD CUSHION RUBBER LEVER SP TORSION LEVER PROP 1 F.SCREW L=27	62 SE - 810353J 63 SP - 822289X 64 SP - 822290X 65 ZS - 822727X 66 ZS - 404225J 67 ZS - 417137 68 SP - 822269X 69 SP - 821799X 70 SA - 812668J 71 SK - 822311X EV - 822311X EV - 822377X 73 SK - 822313X EV - 822377X 74 SK - 822377X 75 SK - 822332X EV - 82242X 76 △ EW - 822665X 76 △ EW - 8226667X 76 △ EW - 822667X 76 △ EW - 822667X 76 △ EW - 822667X	LENS LED PANEL SIDE (L) PANEL SIDE (R) BT CTS30X06STL BZN ST BID40X08STL BZN BID30X04STL CMT for HD COVER BOTTOM COVER MEMORY FOOT B KNOB VOL PART (17) Red VR ROTARY RD14K12D L20 C203X2 KNOB VOL PART (18) Silver VR ROTARY RD14K12D L20 3B103X2 KNOB VOL PART (19) Black VR ROTARY RD14K12D L20 3B103X2 KNOB VOL PART (19) Black VR ROTARY RD14K12D L20 3B103X2 SPACER SLIDE KNOB SLIDE (E) VR SLIDE RF45112P6 L15 B103X2 AC CORD 250SSP301S14 A J AC CORD 183SLP33LS60 A E AC CORD 200SSP60IS14 A B AC CORD 180SSP502BIS14 A S
SW754 SW755 D750 D751 D752 D753 D754 D755 14. FINAL A Ref. No. 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16	ES - 349474 ES - 349474 ES - 349474 ES - 349474 ED - 811455J ASSENBLY BLK Part No. SP - 822292X SP - 822296X EM - 82266X EW - 822291X SP - 822295X ZS - 394414J ZG - 822277X ZG - 822281X MH - 820655X ZS - 428277J ZS - 404181J	SW TACT SKHHAM004A SW TACT SKHHAM004A SW TACT SKHHAM004A D SILICON H 1SS133T-77 T26 Description PANEL LCD WINDOW LCD IND LCD BY-MG24064DLYS-02H WIRE ASSY L4039 W105 24P SHIELD LCD(1) SHIELD LCD(2) PANEL LCD BOTTOM PLATE LCD BOTTOM BT BID30X08STL BZN BUSH PANEL LCD CUSHION RUBBER LEVER SP TORSION LEVER PROP 1 F.SCREW L=27 PAN30X06STL CMT POLY WAVE BT BID30X06STL CMT POLY WAVE	62 SE - 810353J 63 SP - 822289X 64 SP - 822290X 65 ZS - 822727X 66 ZS - 404225J 67 ZS - 417137 68 SP - 822269X 69 SP - 821799X 70 SA - 812668J 71 SK - 822311X EV - 822311X EV - 822377X 73 SK - 822313X EV - 822377X 74 SK - 822377X 75 SK - 822332X EV - 82242X 76 △ EW - 822665X 76 △ EW - 8226667X 76 △ EW - 822667X 76 △ EW - 822667X 76 △ EW - 822667X	LENS LED PANEL SIDE (L) PANEL SIDE (R) BT CTS30X06STL BZN ST BID40X08STL BZN BID30X04STL CMT for HD COVER BOTTOM COVER MEMORY FOOT B KNOB VOL PART (17) Red VR ROTARY RD14K12D L20 C203X2 KNOB VOL PART (18) Silver VR ROTARY RD14K12D L20 3B103X2 KNOB VOL PART (19) Black VR ROTARY RD14K12D L20 3B103X2 KNOB VOL PART (19) Black VR ROTARY RD14K12D L20 3B103X2 SPACER SLIDE KNOB SLIDE (E) VR SLIDE RF45112P6 L15 B103X2 AC CORD 250SSP301S14 A J AC CORD 183SLP33LS60 A E AC CORD 200SSP60IS14 A B AC CORD 180SSP502BIS14 A S
SW754 SW755 D750 D751 D752 D753 D754 D755 14. FINAL A Ref. No. 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17	ES - 349474 ES - 349474 ES - 349474 ES - 349474 ED - 811455J ED - 812292X ASSENBLY BLK Part No. SP - 822292X SP - 822296X EM - 822296X EM - 822296X EW - 822353X SZ - 821800X SZ - 821800X SZ - 821801X SP - 822291X SP - 822291X SP - 822297X ZS - 394414J ZG - 822277X ZG - 822281X MH - 820655X ZS - 404181J ZS - 428277J	SW TACT SKHHAM004A SW TACT SKHHAM004A SW TACT SKHHAM004A D SILICON H 1SS133T-77 T26 Description PANEL LCD WINDOW LCD IND LCD BY-MG24064DLYS-02H WIRE ASSY L4039 W105 24P SHIELD LCD(1) SHIELD LCD(2) PANEL LCD BOTTOM PLATE LCD BOTTOM BT BID30X08STL BZN BUSH PANEL LCD CUSHION RUBBER LEVER SP TORSION LEVER PROP 1 F.SCREW L=27 PAN30X06STL CMT POLY WAVE BT BID30X06STL CMT POLY WAVE	62 SE - 810353J 63 SP - 822289X 64 SP - 822290X 65 ZS - 822727X 66 ZS - 404225J 67 ZS - 417137 68 SP - 822269X 69 SP - 821799X 70 SA - 812668J 71 SK - 822311X EV - 822311X EV - 822377X 73 SK - 822313X EV - 822377X 74 SK - 822377X 75 SK - 822332X EV - 82242X 76 △ EW - 822665X 76 △ EW - 8226667X 76 △ EW - 822667X 76 △ EW - 822667X 76 △ EW - 822667X	LENS LED PANEL SIDE (L) PANEL SIDE (R) BT CTS30X06STL BZN ST BID40X08STL BZN BID30X04STL CMT for HD COVER BOTTOM COVER MEMORY FOOT B KNOB VOL PART (17) Red VR ROTARY RD14K12D L20 C203X2 KNOB VOL PART (18) Silver VR ROTARY RD14K12D L20 3B103X2 KNOB VOL PART (19) Black VR ROTARY RD14K12D L20 3B103X2 KNOB VOL PART (19) Black VR ROTARY RD14K12D L20 3B103X2 SPACER SLIDE KNOB SLIDE (E) VR SLIDE RF45112P6 L15 B103X2 AC CORD 250SSP301S14 A J AC CORD 183SLP33LS60 A E AC CORD 200SSP60IS14 A B AC CORD 180SSP502BIS14 A S
SW754 SW755 D750 D751 D752 D753 D754 D755 14. FINAL A Ref. No. 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18	ES - 349474 ES - 349474 ES - 349474 ES - 349474 ED - 811455J ED - 812292X EM - 822292X EM - 822296X EM - 822353X EW - 822353X EW - 822353X EW - 822291X EW - 822291X EW - 822291X EW - 822291X EW - 822295X ZS - 394414J ZG - 822277X ZG - 4282777 ZS - 404181J ZS - 4282777 ZS - 404181J	SW TACT SKHHAM004A SW TACT SKHHAM004A SW TACT SKHHAM004A D SILICON H 1SS133T-77 T26 Description PANEL LCD WINDOW LCD IND LCD BY-MG24064DLYS-02H WIRE ASSY L4039 W105 24P SHIELD LCD(1) SHIELD LCD(2) PANEL LCD BOTTOM PLATE LCD BOTTOM PLATE LCD BOTTOM BT BID30X08STL BZN BUSH PANEL LCD CUSHION RUBBER LEVER SP TORSION LEVER PROP 1 F.SCREW L=27 PAN30X06STL CMT POLY WAVE BT BID30X06STL CMT POLY WAVE BT BID30X06STL CMT POLY WAVE BT BID30X06STL CMT POLY WAVE	62 SE - 810353J 63 SP - 822289X 64 SP - 822290X 65 ZS - 822727X 66 ZS - 404225J 67 ZS - 417137 68 SP - 822269X 69 SP - 821799X 70 SA - 812668J 71 SK - 822311X EV - 822311X EV - 822377X 73 SK - 822313X EV - 822377X 74 SK - 822377X 75 SK - 822332X EV - 82242X 76 △ EW - 822665X 76 △ EW - 8226667X 76 △ EW - 822667X 76 △ EW - 822667X 76 △ EW - 822667X	LENS LED PANEL SIDE (L) PANEL SIDE (R) BT CTS30X06STL BZN ST BID40X08STL BZN BID30X04STL CMT for HD COVER BOTTOM COVER MEMORY FOOT B KNOB VOL PART (17) Red VR ROTARY RD14K12D L20 C203X2 KNOB VOL PART (18) Silver VR ROTARY RD14K12D L20 3B103X2 KNOB VOL PART (19) Black VR ROTARY RD14K12D L20 3B103X2 KNOB VOL PART (19) Black VR ROTARY RD14K12D L20 3B103X2 SPACER SLIDE KNOB SLIDE (E) VR SLIDE RF45112P6 L15 B103X2 AC CORD 250SSP301S14 A J AC CORD 183SLP33LS60 A E AC CORD 200SSP60IS14 A B AC CORD 180SSP502BIS14 A S
SW754 SW755 D750 D751 D752 D753 D754 D755 14. FINAL A Ref. No. 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18	ES - 349474 ES - 349474 ES - 349474 ES - 349474 ED - 811455J ED - 812292X SP - 822292X SP - 822296X EM - 822661X EW - 822661X EW - 822353X SZ - 821801X SP - 822291X SP - 8222	SW TACT SKHHAM004A SW TACT SKHHAM004A SW TACT SKHHAM004A D SILICON H 1SS133T-77 T26 WINDOW LCD LCD WINDOW LCD IND LCD BY-MG24064DLYS-02H WIRE ASSY L4039 W105 24P SHIELD LCD(1) SHIELD LCD(2) PANEL LCD BOTTOM PLATE LCD BOTTOM PLATE LCD BOTTOM BT BID30X08STL BZN BUSH PANEL LCD CUSHION RUBBER LEVER SP TORSION LEVER PROP 1 F.SCREW L=27 PAN30X06STL CMT POLY WAVE BT BID30X06STL CMT POLY WAVE BT BID30X06STL BZN PAN30X06STL CMT POLY WAVE BT BID30X06STL BZN PROP M.SCREW L=15.1	62 SE - 810353J 63 SP - 822289X 64 SP - 822290X 65 ZS - 822727X 66 ZS - 404225J 67 ZS - 417137 68 SP - 822269X 69 SP - 821799X 70 SA - 812668J 71 SK - 822311X EV - 822311X EV - 822377X 73 SK - 822313X EV - 822377X 74 SK - 822377X 75 SK - 822332X EV - 82242X 76 △ EW - 822665X 76 △ EW - 8226667X 76 △ EW - 822667X 76 △ EW - 822667X 76 △ EW - 822667X	LENS LED PANEL SIDE (L) PANEL SIDE (R) BT CTS30X06STL BZN ST BID40X08STL BZN BID30X04STL CMT for HD COVER BOTTOM COVER MEMORY FOOT B KNOB VOL PART (17) Red VR ROTARY RD14K12D L20 C203X2 KNOB VOL PART (18) Silver VR ROTARY RD14K12D L20 3B103X2 KNOB VOL PART (19) Black VR ROTARY RD14K12D L20 3B103X2 KNOB VOL PART (19) Black VR ROTARY RD14K12D L20 3B103X2 SPACER SLIDE KNOB SLIDE (E) VR SLIDE RF45112P6 L15 B103X2 AC CORD 250SSP301S14 A J AC CORD 183SLP33LS60 A E AC CORD 200SSP60IS14 A B AC CORD 180SSP502BIS14 A S
SW754 SW755 D750 D751 D752 D753 D754 D755 14. FINAL A Ref. No. 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20	ES - 349474 ES - 349474 ES - 349474 ES - 349474 ED - 811455J ED - 81295J ASSENBLY BLK Part No. SP - 822292X SP - 822292X SP - 822296X EM - 822661X EW - 822353X SZ - 821801X SP - 822291X SP - 822277X ZS - 394414J ZG - 822277X ZG - 822281X MH - 820655X ZS - 404181J ZS - 404181J MH - 822280X SB - 810525J	SW TACT SKHHAM004A SW TACT SKHHAM004A SW TACT SKHHAM004A D SILICON H 1SS133T-77 T26 Description PANEL LCD WINDOW LCD IND LCD BY-MG24064DLYS-02H WIRE ASSY L4039 W105 24P SHIELD LCD(1) SHIELD LCD(2) PANEL LCD BOTTOM PLATE LCD BOTTOM BT BID30X08STL BZN BUSH PANEL LCD CUSHION RUBBER LEVER SP TORSION LEVER PROP 1 F.SCREW L=27 PAN30X06STL CMT POLY WAVE BT BID30X06STL BZN PAN30X06STL CMT POLY WAVE BT BID30X06STL BZN PROP M.SCREW L=15.1 BUTTON POWER Knob	62 SE - 810353J 63 SP - 822289X 64 SP - 822290X 65 ZS - 822727X 66 ZS - 404225J 67 ZS - 417137 68 SP - 822269X 69 SP - 821799X 70 SA - 812668J 71 SK - 822311X EV - 822311X EV - 822377X 73 SK - 822313X EV - 822377X 74 SK - 822377X 75 SK - 822332X EV - 82242X 76 △ EW - 822665X 76 △ EW - 8226667X 76 △ EW - 822667X 76 △ EW - 822667X 76 △ EW - 822667X	LENS LED PANEL SIDE (L) PANEL SIDE (R) BT CTS30X06STL BZN ST BID40X08STL BZN BID30X04STL CMT for HD COVER BOTTOM COVER MEMORY FOOT B KNOB VOL PART (17) Red VR ROTARY RD14K12D L20 C203X2 KNOB VOL PART (18) Silver VR ROTARY RD14K12D L20 3B103X2 KNOB VOL PART (19) Black VR ROTARY RD14K12D L20 3B103X2 KNOB VOL PART (19) Black VR ROTARY RD14K12D L20 3B103X2 SPACER SLIDE KNOB SLIDE (E) VR SLIDE RF45112P6 L15 B103X2 AC CORD 250SSP301S14 A J AC CORD 183SLP33LS60 A E AC CORD 200SSP60IS14 A B AC CORD 180SSP502BIS14 A S
SW754 SW755 D750 D751 D752 D753 D754 D755 14. FINAL A Ref. No. 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20	ES - 349474 ES - 349474 ES - 349474 ES - 349474 ED - 811455J ED - 812292X SP - 822292X SP - 822296X EM - 822661X EW - 822661X EW - 822353X SZ - 821801X SP - 822291X SP - 8222	SW TACT SKHHAM004A SW TACT SKHHAM004A SW TACT SKHHAM004A D SILICON H 1SS133T-77 T26 WINDOW LCD LCD WINDOW LCD IND LCD BY-MG24064DLYS-02H WIRE ASSY L4039 W105 24P SHIELD LCD(1) SHIELD LCD(2) PANEL LCD BOTTOM PLATE LCD BOTTOM PLATE LCD BOTTOM BT BID30X08STL BZN BUSH PANEL LCD CUSHION RUBBER LEVER SP TORSION LEVER PROP 1 F.SCREW L=27 PAN30X06STL CMT POLY WAVE BT BID30X06STL CMT POLY WAVE BT BID30X06STL BZN PAN30X06STL CMT POLY WAVE BT BID30X06STL BZN PROP M.SCREW L=15.1	62 SE - 810353J 63 SP - 822289X 64 SP - 822290X 65 ZS - 822727X 66 ZS - 404225J 67 ZS - 417137 68 SP - 822269X 69 SP - 821799X 70 SA - 812668J 71 SK - 822311X EV - 822311X EV - 822377X 73 SK - 822313X EV - 822377X 74 SK - 822377X 75 SK - 822332X EV - 82242X 76 △ EW - 822665X 76 △ EW - 8226667X 76 △ EW - 822667X 76 △ EW - 822667X 76 △ EW - 822667X	LENS LED PANEL SIDE (L) PANEL SIDE (R) BT CTS30X06STL BZN ST BID40X08STL BZN BID30X04STL CMT for HD COVER BOTTOM COVER MEMORY FOOT B KNOB VOL PART (17) Red VR ROTARY RD14K12D L20 C203X2 KNOB VOL PART (18) Silver VR ROTARY RD14K12D L20 3B103X2 KNOB VOL PART (19) Black VR ROTARY RD14K12D L20 3B103X2 KNOB VOL PART (19) Black VR ROTARY RD14K12D L20 3B103X2 SPACER SLIDE KNOB SLIDE (E) VR SLIDE RF45112P6 L15 B103X2 AC CORD 250SSP301S14 A J AC CORD 183SLP33LS60 A E AC CORD 200SSP60IS14 A B AC CORD 180SSP502BIS14 A S

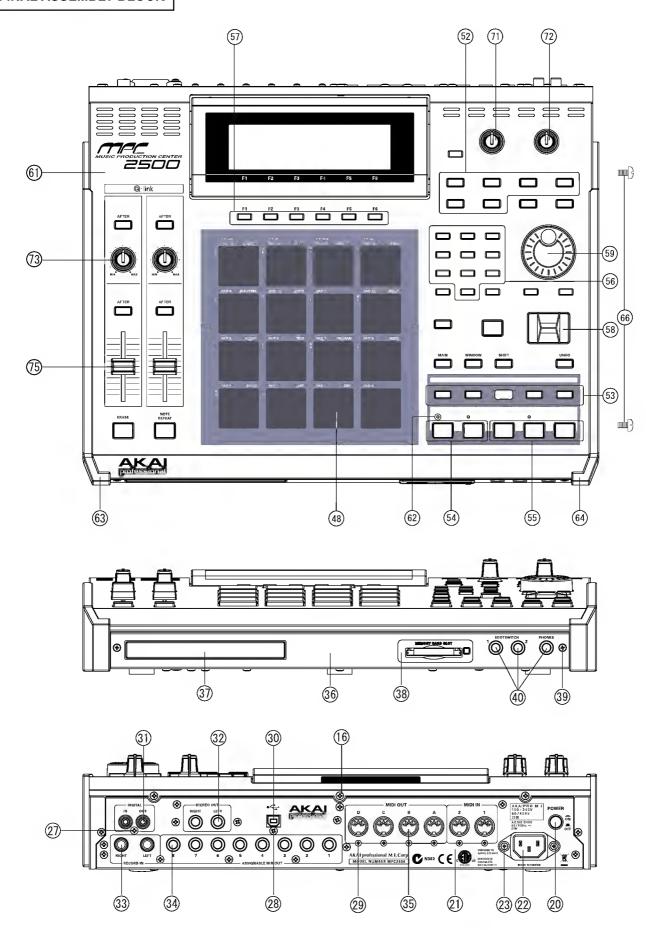


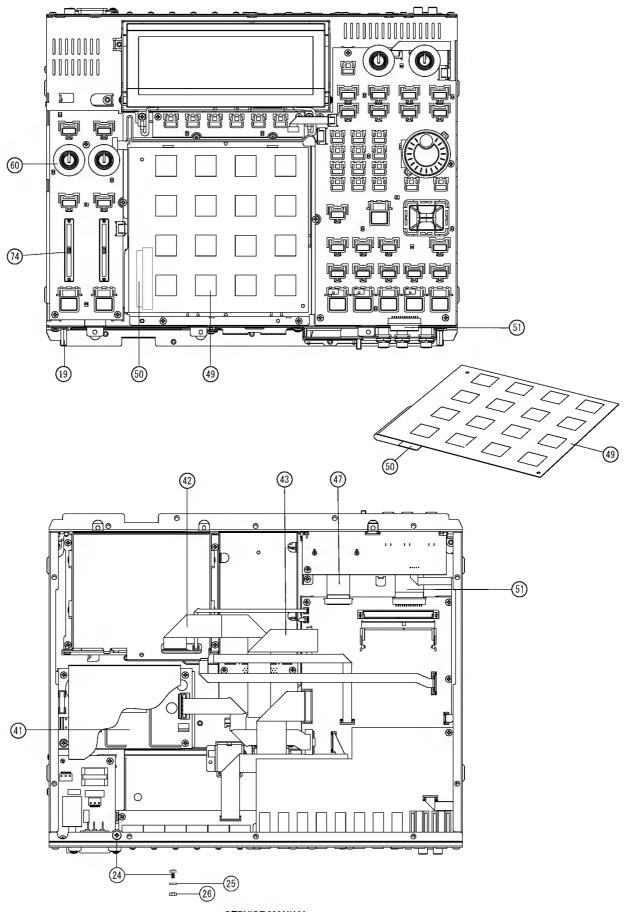


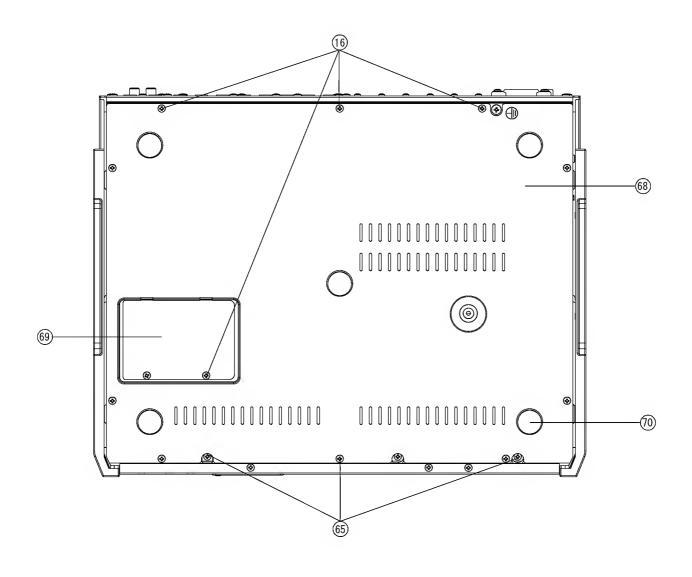





67)

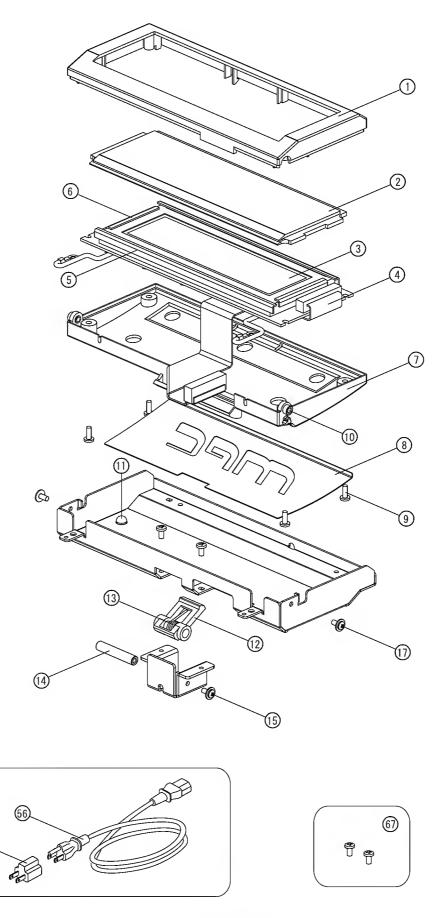

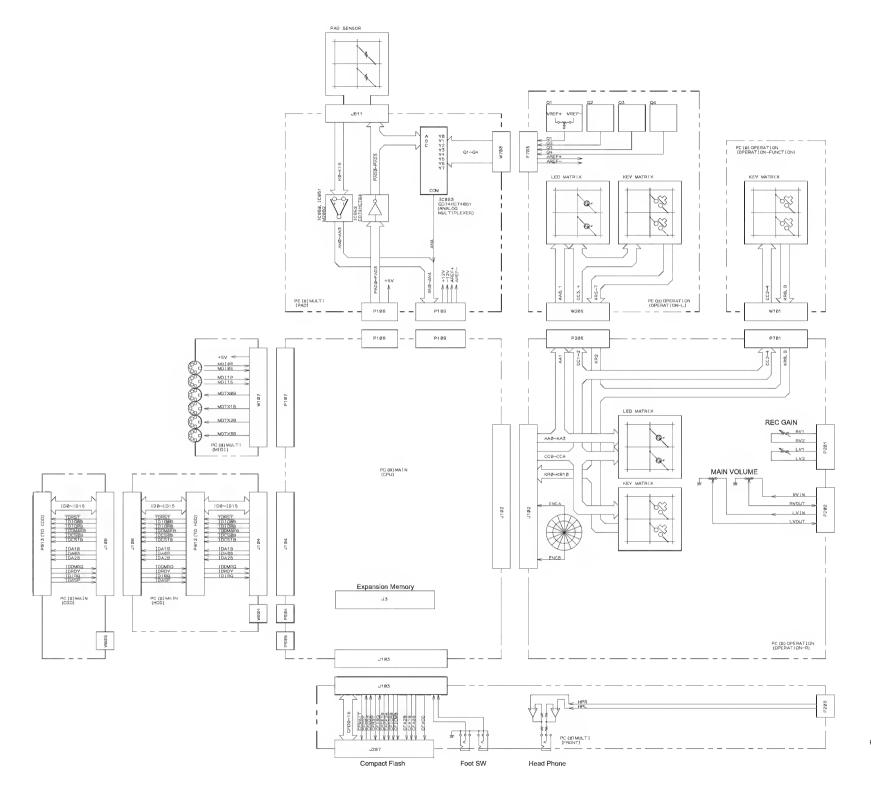

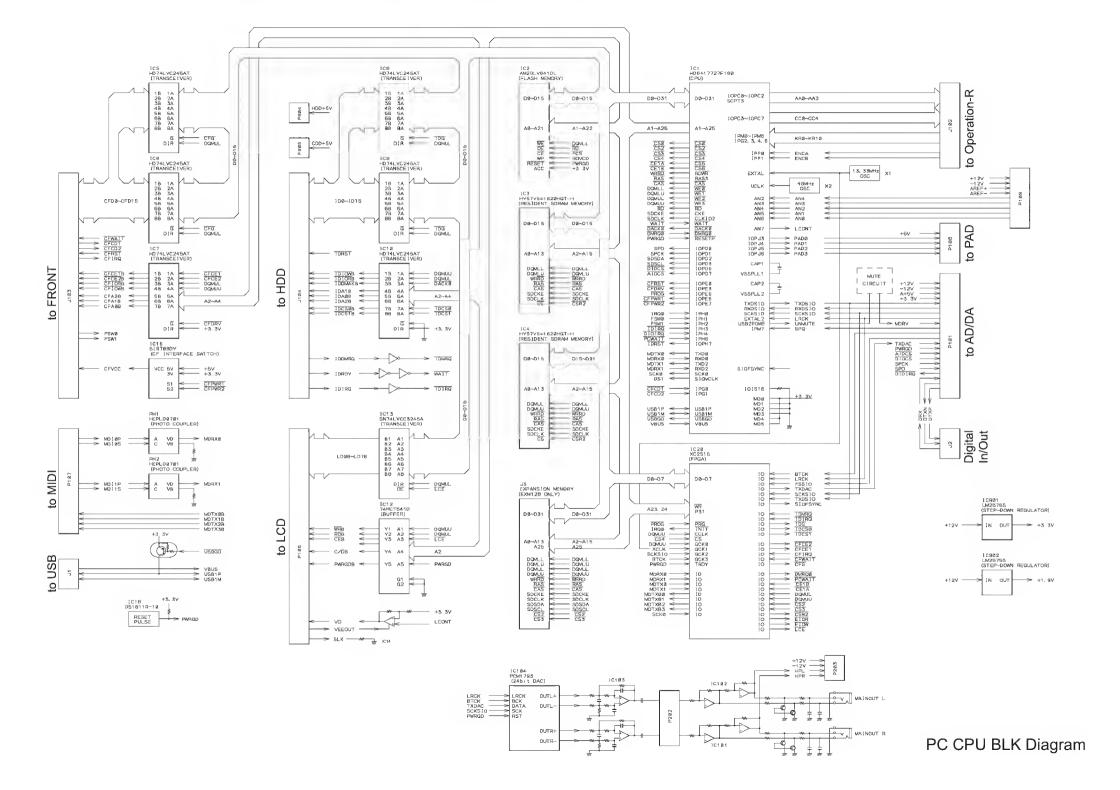

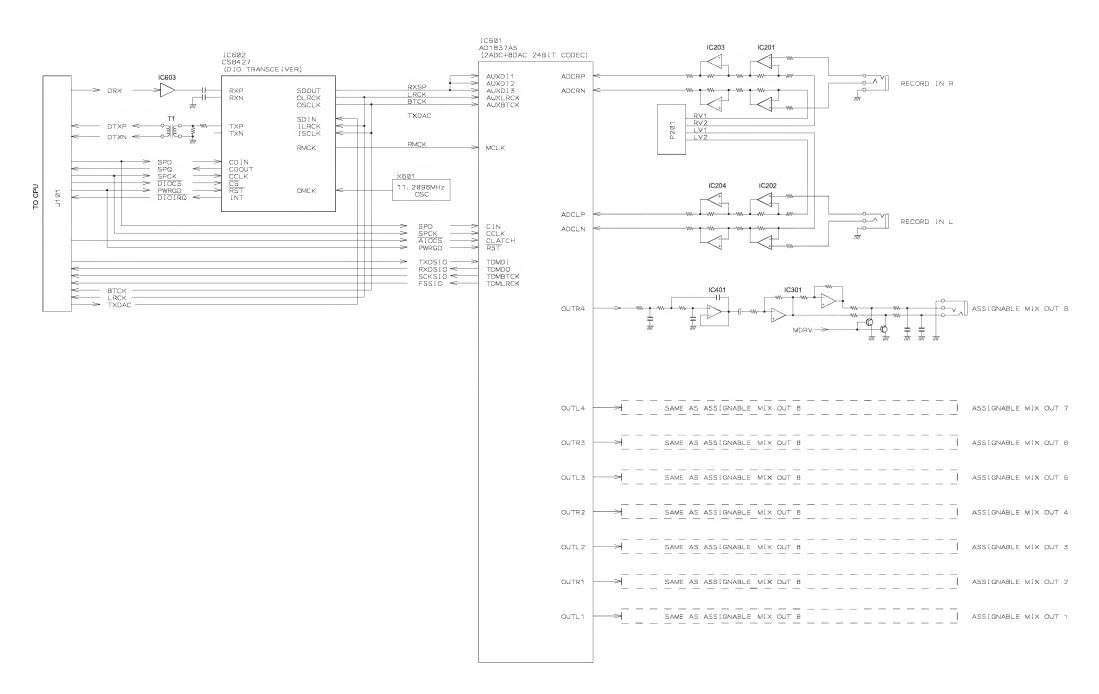

PC AD/DA BLK Diagram

